


■ Specifications

1. Current rating: 0.7A AC/DC
2. Voltage rating: 50V AC/DC
3. Withstand voltage: 500V AC/minute
4. Insulation resistance: 500M Ω min
5. Contact resistance: 20m Ω max
6. Temperature range: -25°C to +105°C
7. Applicable PC board thickness: 0.6~1.2mm(.024" to .047") (including temperature rise)
8. Applicable wires: AWG#30-#28
Insulation O.D.: 0.7-0.8mm
9. Circuits: 02~13 circuits available

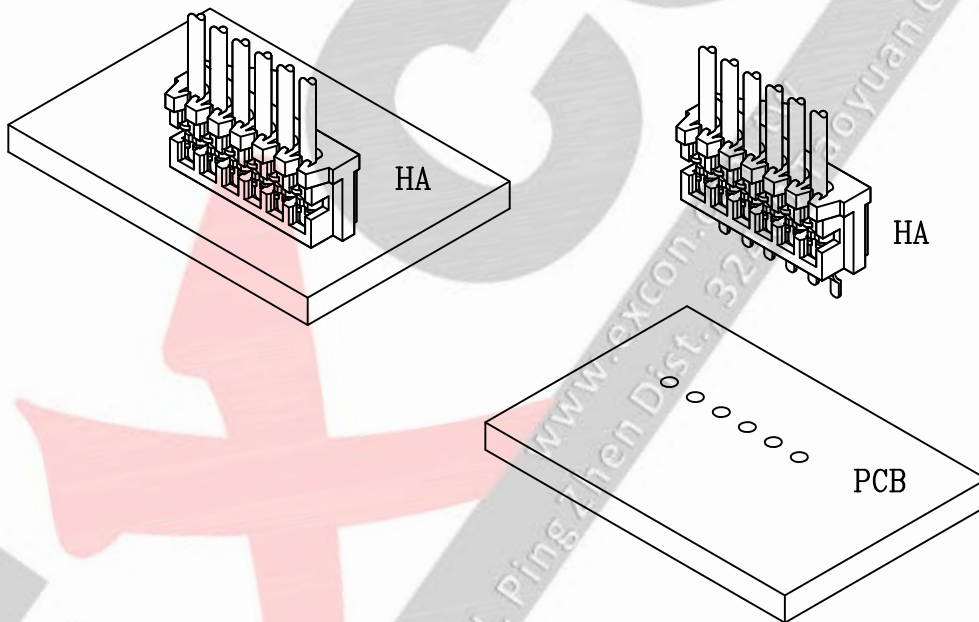

Part Code Information:

1502-WW XX YY

① ② ③ ④

① Series Name

② Circuits Number

02~13

00 For Terminal

③ Product Type



HA=Housing

④ Material/Finishing/Color

001=NY66 UL94V0,White Color, Wire AWG 30
008=NY66 UL94V0,Green Color, Wire AWG 28

Housing

1. Part No.: 1502xxHA00x
2. Part Name: 1502 Housing
3. Material: Nylon 66 UL 94V0
4. Color: Green / White

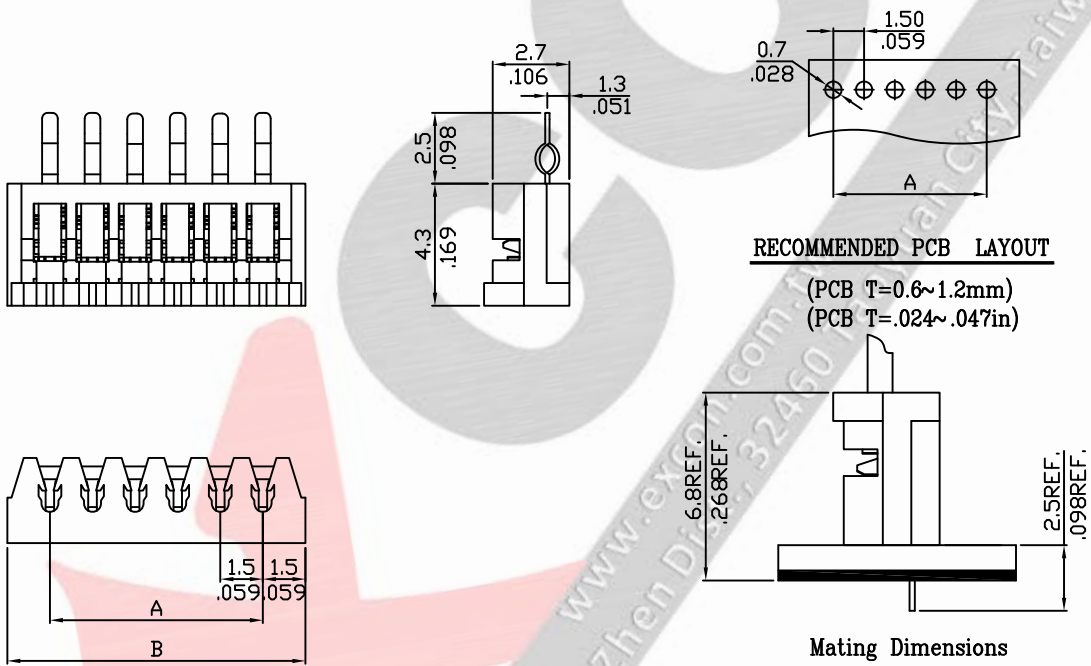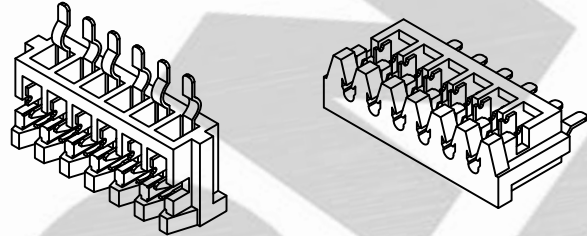

Ordering Information and Dimensions:

Part No.	Circuits	Dim A	Dim B	Part No.	Circuits	Dim A	Dim B
150202HA00x	2	1.5(.059)	4.5(.177)	150208HA00x	8	10.5(.413)	13.5(.531)
150203HA00x	3	3.0(.118)	6.0(.236)	150209HA00x	9	12.0(.472)	15.0(.591)
150204HA00x	4	4.5(.177)	7.5(.295)	150210HA00x	10	13.5(.531)	16.5(.650)
150205HA00x	5	6.0(.236)	9.0(.354)	150211HA00x	11	15.0(.591)	18.0(.709)
150206HA00x	6	7.5(.295)	10.5(.413)	150212HA00x	12	16.5(.650)	19.5(.768)
150207HA00x	7	9.0(.354)	12.0(.472)	150213HA00x	13	18.0(.709)	21.0(.827)

Part Code Information:

1502-WW XX YY

① ② ③ ④

① Series Name

② Circuits Number

02~13

③ Product Type

HA=Housing

④ Material/Finishing/Color

001=NY66 UL94V0,White Color, Wire AWG 30
008=NY66 UL94V0,Green Color, Wire AWG 28