
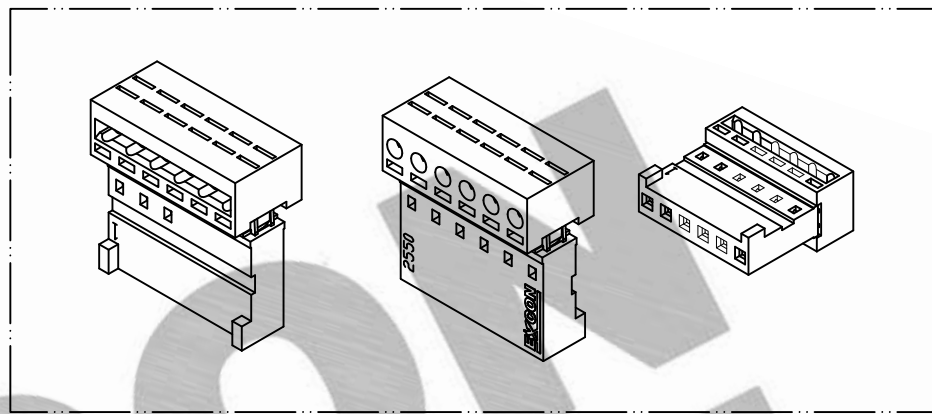



10 9 8 7 6 5 4 3 2 1

PART NO. 2550xxHB203
 DWG NO. C2550HB

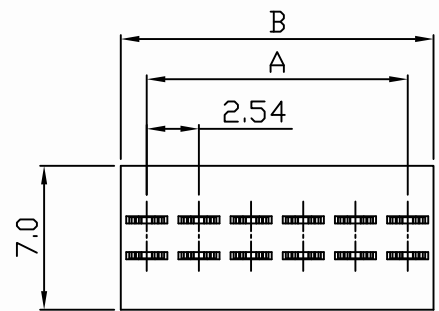

Ordering Information and Dimensions:

Part No.	Circuits	Dim A	Dim B
255002HB203	2	2.54	5.08
255003HB203	3	5.08	7.62
255004HB203	4	7.62	10.16
255005HB203	5	10.16	12.70
255006HB203	6	12.70	15.24
255007HB203	7	15.24	17.78
255008HB203	8	17.78	20.32
255009HB203	9	20.32	22.86
255010HB203	10	22.86	25.40
255011HB203	11	25.40	27.94
255012HB203	12	27.94	30.48
255013HB203	13	30.48	33.02
255014HB203	14	33.02	35.56
255015HB203	15	35.56	38.10
255016HB203	16	38.10	40.64

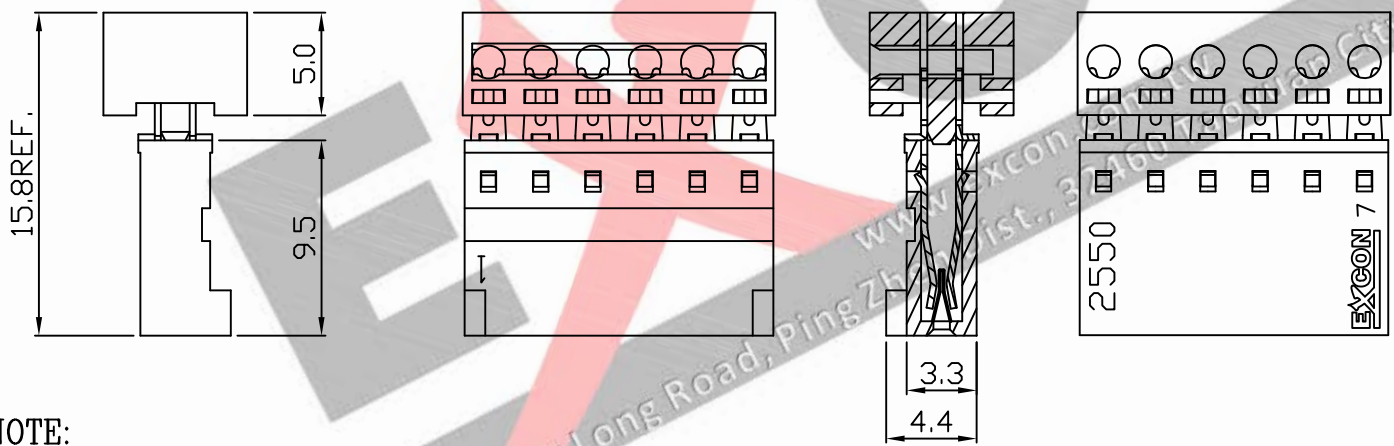

NOTE:

1. Wafer Material: PBT UL94V-0
2. Use Wire: AWG 26
3. Insulation resistance: 1000M ohm/min.
4. Withstand voltage: 1000V AC/minute.
5. Current rating: 3A AC/DC.
6. Voltage rating: 250V AC/DC
2. Plated: Gold flash-plated 1u" min

				UNLESS OTHERWISE SPECIFIED TOLERANCES	
				3 PLACE ±0.5 ±0.10	
				2 PLACE ±1.5 ±0.35	
				1 PLACE ±2.0 ±0.50	
				ANGLE DIM	
REV.	REVISION		DIS	DATE	
SCALE	REV.	PAGE:	UNIT	MM	
4/1	A	1	THIRD ANGLE PROJECTION		

EXCON

EXCON TECHNOLOGY COMPANY

PART.NO

2550xxHB203

A

B

C

D

E

F

10 9 8 7 6 5 4 3 2 1