

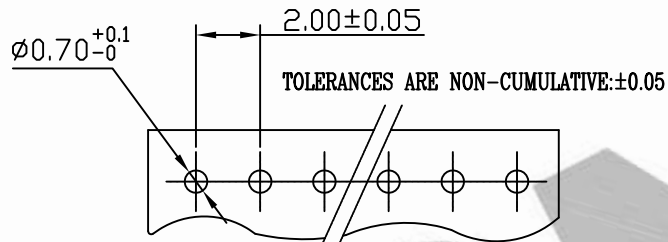
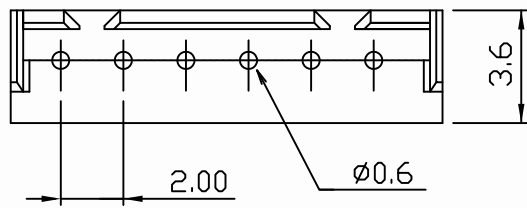
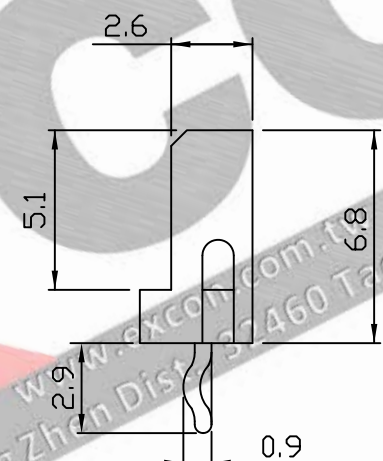


PART NO.
2006xxWV001
DWG NO.
C2006WV

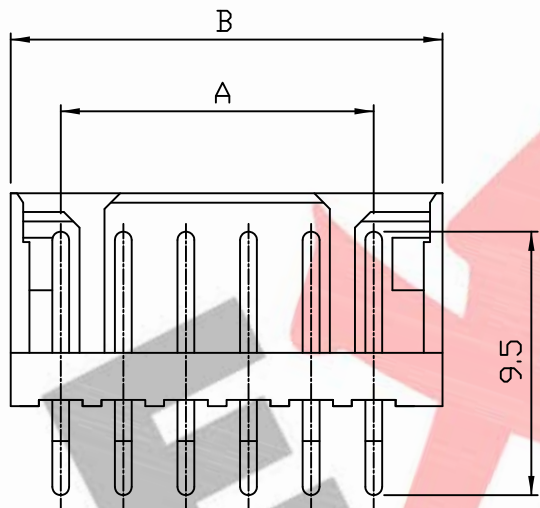

RECOMMENDED PCB LAYOUT
(PCB THK=1.0~1.6)

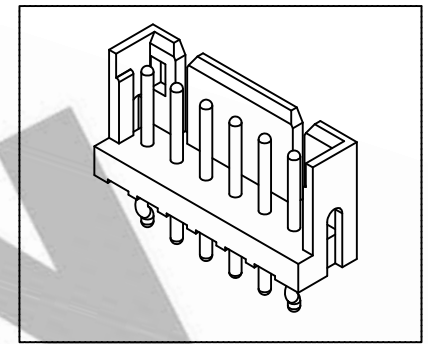

Dimensional & Ordering Information:

Part No.	Circuits	Dim A	Dim B
200602WV001	2	2.0	6.0
200603WV001	3	4.0	8.0
200604WV001	4	6.0	10.0
200605WV001	5	8.0	12.0
200606WV001	6	10.0	14.0
200607WV001	7	12.0	16.0
200608WV001	8	14.0	18.0
200609WV001	9	16.0	20.0
200610WV001	10	18.0	22.0
200611WV001	11	20.0	24.0
200612WV001	12	22.0	26.0
200613WV001	13	24.0	28.0
200614WV001	14	26.0	30.0
200615WV001	15	28.0	32.0
200616WV001	16	30.0	34.0

NOTE:

1. Wafer Material: Nylon 66 UL94V-0
Pin/Pos Material: brass bronze.
2. Plated: Tin-plated 50u"min.
3. Insulation resistance: 1000MΩ min.
4. Withstand voltage: 800V AC/minute.
5. Current rating: 3A AC/DC.
6. Voltage rating: 250V AC/DC

						UNLESS OTHERWISE SPECIFIED TOLERANCES 3 PLACE ±0.5 ±0.10 2 PLACE ±1.5 ±0.35 1 PLACE ±2.0 ±0.50 ANGLE DIM	EXCON EXCON TECHNOLOGY COMPANY	
REV.	REVISIONI			DIS	DATE			
SCALE	REV.	PAGE:	UNIT	mm		DWG NO:		PART.NO
4/1	A	1	THIRD ANGLE PROJECTION			C2006WV		2006xxWV001