


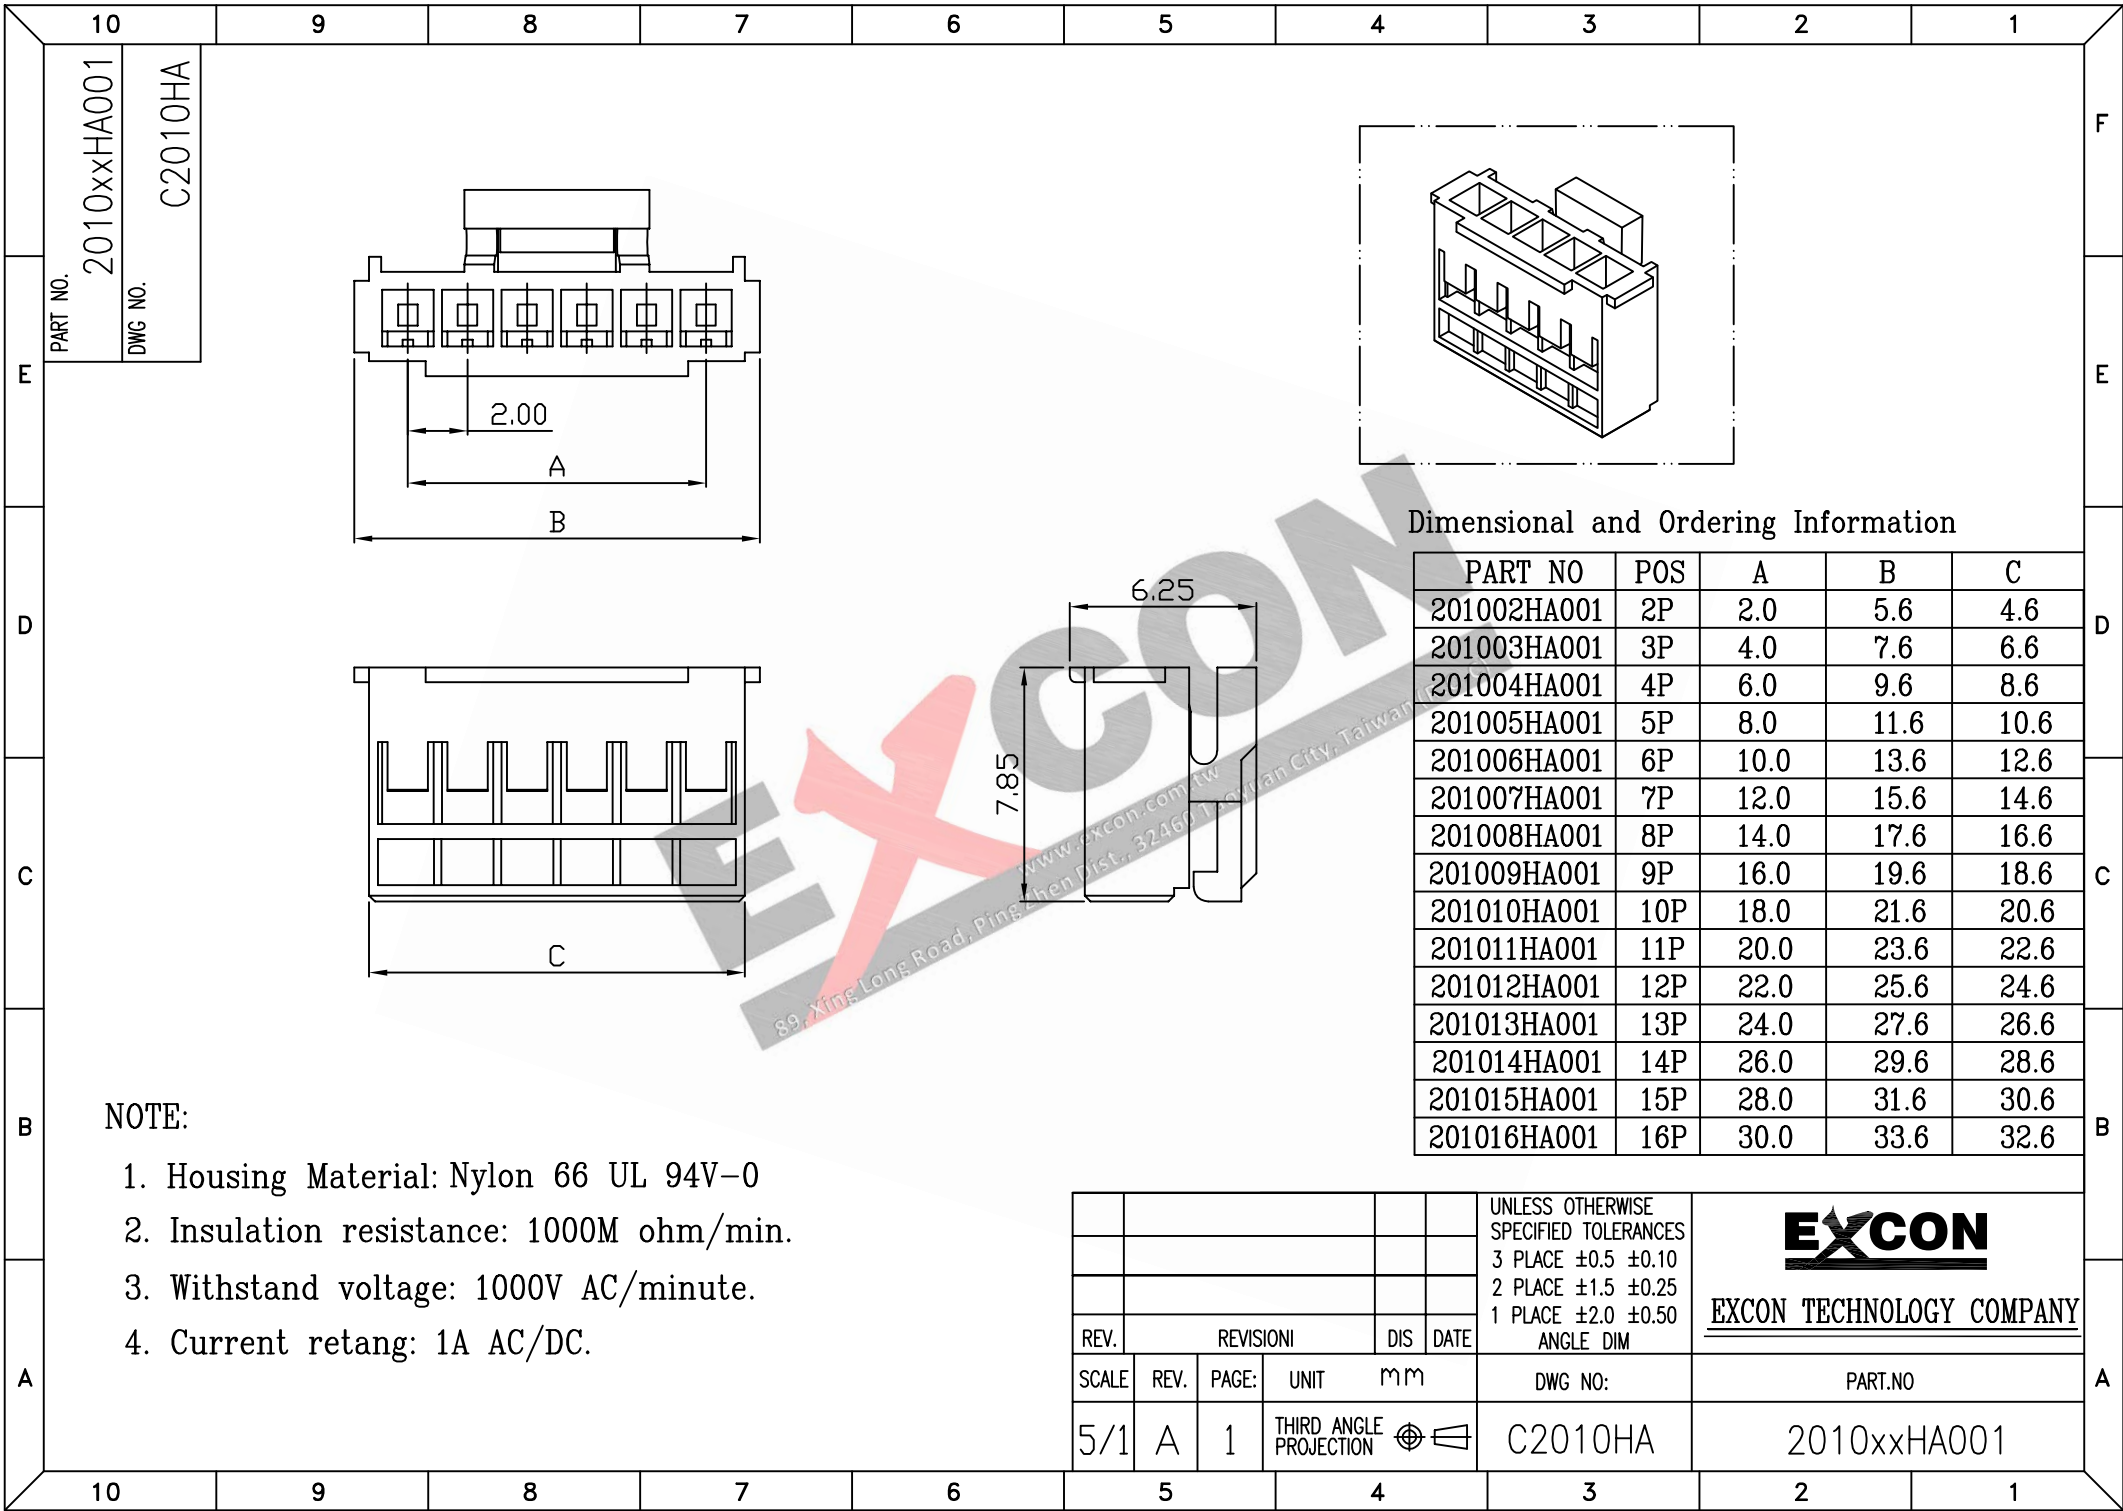

Dimensional and Ordering Information

PART NO	POS	A	B	C
201002HA001	2P	2.0	5.6	4.6
201003HA001	3P	4.0	7.6	6.6
201004HA001	4P	6.0	9.6	8.6
201005HA001	5P	8.0	11.6	10.6
201006HA001	6P	10.0	13.6	12.6
201007HA001	7P	12.0	15.6	14.6
201008HA001	8P	14.0	17.6	16.6
201009HA001	9P	16.0	19.6	18.6
201010HA001	10P	18.0	21.6	20.6
201011HA001	11P	20.0	23.6	22.6
201012HA001	12P	22.0	25.6	24.6
201013HA001	13P	24.0	27.6	26.6
201014HA001	14P	26.0	29.6	28.6
201015HA001	15P	28.0	31.6	30.6
201016HA001	16P	30.0	33.6	32.6

- NOTE:
- 1. Housing Material: Nylon 66 UL 94V-0
 - 2. Insulation resistance: 1000M ohm/min.
 - 3. Withstand voltage: 1000V AC/minute.
 - 4. Current rating: 1A AC/DC.

					UNLESS OTHERWISE SPECIFIED TOLERANCES 3 PLACE ±0.5 ±0.10 2 PLACE ±1.5 ±0.25 1 PLACE ±2.0 ±0.50 ANGLE DIM	EXCON EXCON TECHNOLOGY COMPANY
REV.	REVISION			DIS		
SCALE	REV.	PAGE:	UNIT mm		DWG NO:	PART.NO
5/1	A	1	THIRD ANGLE PROJECTION		C2010HA	2010xxHA001