




TOLERANCES ARE NON-CUMULATIVE:±0.05





2~4P





5~9P

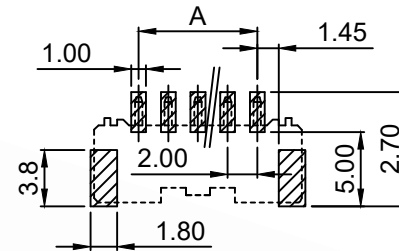

RECOMMENDED PCB LAYOUT
(PCB THK=1.0~1.6)

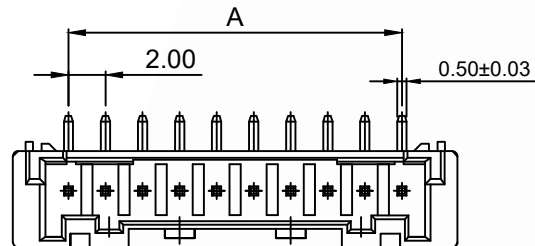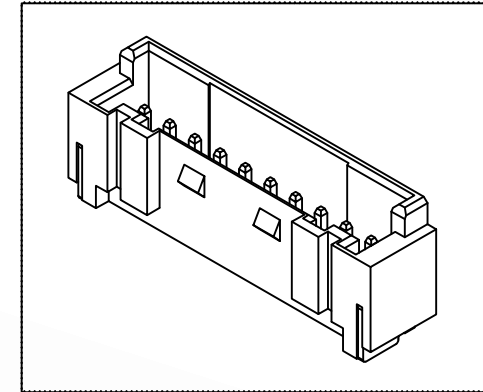

10~16P

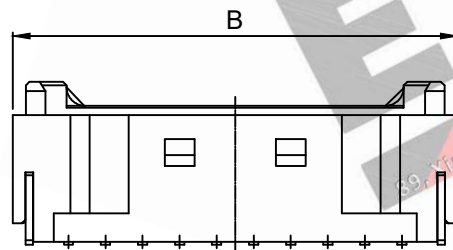

Dimensional &
Ordering Information:

Part No.	Circuits	A	B
201102WD201	2	2.00	8.0
201103WD201	3	4.00	10.0
201104WD201	4	6.00	12.0
201106WD201	6	8.00	14.0
201108WD201	8	10.00	16.0
201107WD201	7	12.00	18.0
201108WD201	8	14.00	20.0
201109WD201	9	16.00	22.0
201110WD201	10	18.00	24.0
201111WD201	11	20.00	26.0
201112WD201	12	22.00	28.0
201113WD201	13	24.00	30.0
201114WD201	14	26.00	32.0
201115WD201	15	28.00	34.0
201116WD201	16	30.00	36.0

NOTE:

1. Wafer Material: PBT UL 94V-0
Pin/Pos Material: brass bronze.
2. Plated: Tin-plated 50u"min.
3. Insulation resistance: 1000M ohm/min.
4. Withstand voltage: 800V AC/minute.
5. Current rating: 3A AC/DC.
6. Voltage rating: 250V AC/DC

					UNLESS OTHERWISE SPECIFIED TOLERANCES 3 PLACE ±0.5 ±0.10 2 PLACE ±1.5 ±0.35 1 PLACE ±2.0 ±0.50 ANGLE DIM	EXCON EXCON TECHNOLOGY COMPANY
REV.	REVISION			DIS	DATE	
SCALE	REV.	PAGE:	UNIT	mm		
4/1	A	1	THIRD ANGLE PROJECTION			
				DWG NO:	PART.NO	
				C2011WD	2011xxWD201	