




PART NO. 2011xxWE201
DWG NO. C2011WE




2~4P




5~9P

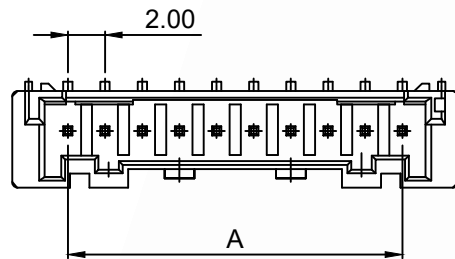


10~16P

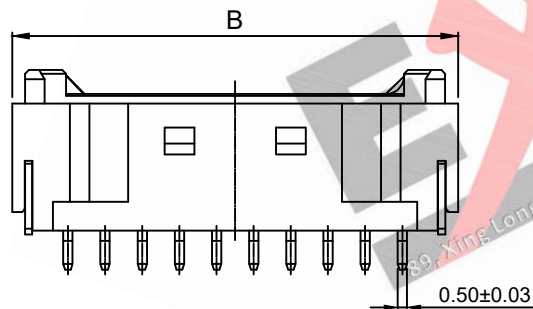

TOLERANCES ARE NON-CUMULATIVE:±0.05



RECOMMENDED PCB LAYOUT
(PCB THK=1.0~1.6)

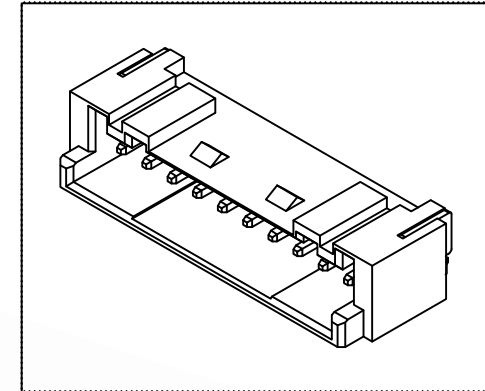

Dimensional & Ordering Information:

Part No.	Circuits	A	B
201102WE201	2	2.00	8.0
201103WE201	3	4.00	10.0
201104WE201	4	6.00	12.0
201106WE201	6	8.00	14.0
201106WE201	6	10.00	16.0
201107WE201	7	12.00	18.0
201108WE201	8	14.00	20.0
201109WE201	9	16.00	22.0
201110WE201	10	18.00	24.0
201111WE201	11	20.00	26.0
201112WE201	12	22.00	28.0
201113WE201	13	24.00	30.0
201114WE201	14	26.00	32.0
201115WE201	15	28.00	34.0
201116WE201	16	30.00	36.0

NOTE:

1. Wafer Material: PBT UL 94V-0
Pin/Pos Material: brass bronze.
2. Plated: Tin-plated 50u"min.
3. Insulation resistance: 1000M ohm/min.
4. Withstand voltage: 800V AC/minute.
5. Current rating: 3A AC/DC.
6. Voltage rating: 250V AC/DC

REV.	REVISION	DIS	DATE
SCALE	REV.	PAGE	UNIT
4/1	A	1	mm
THIRD ANGLE PROJECTION			

UNLESS OTHERWISE SPECIFIED TOLERANCES
3 PLACE ±0.5 ±0.10
2 PLACE ±1.5 ±0.35
1 PLACE ±2.0 ±0.50
ANGLE DIM

DWG NO:

C2011WE

EXCON
EXCON TECHNOLOGY COMPANY

PART.NO

2011xxWE201