

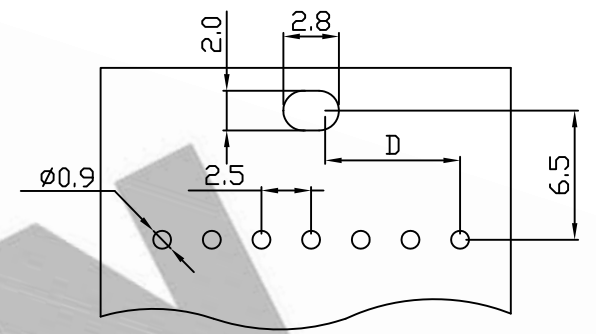
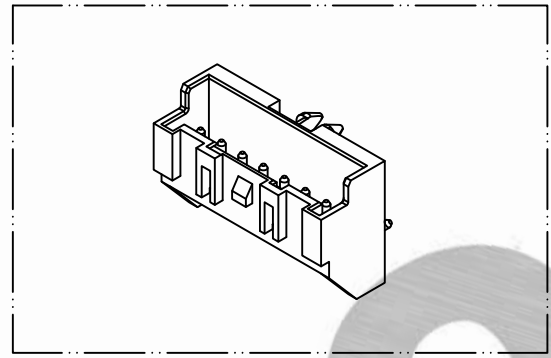
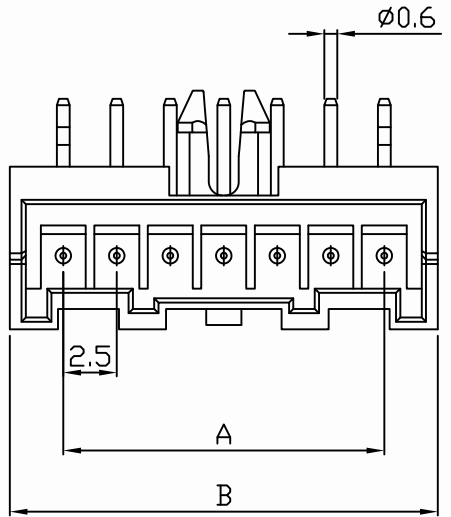


PART NO. 2517xxWF101
 DWG NO. C2517WF

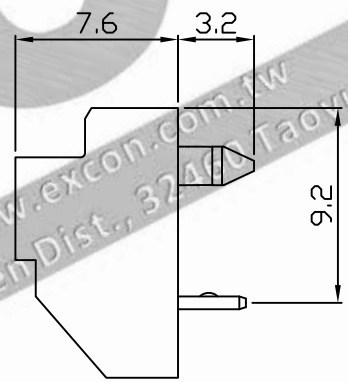

RECOMMENDED PCB LAYOUT
 (PCB THK=0.8~1.6)

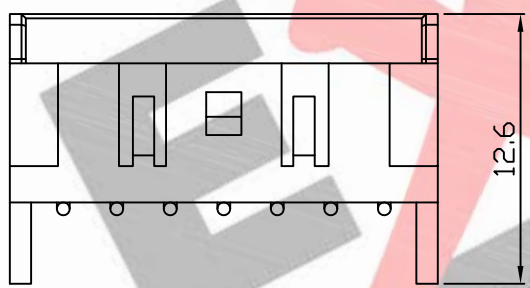

Dimensional & Ordering Information:

Part No.	Circuits	Dim A	Dim B
251702WF001	2	2.50	7.50
251703WF001	3	5.00	10.00
251704WF001	4	7.50	12.50
251705WF001	5	10.00	15.00
251706WF001	6	12.50	17.50
251707WF001	7	15.00	20.00
251708WF001	8	17.50	22.50
251709WF001	9	20.00	25.00
251710WF001	10	22.50	27.50
251711WF001	11	25.00	30.00
251712WF001	12	27.50	32.50
251713WF001	13	30.00	35.00
251714WF001	14	32.50	37.50
251715WF001	15	35.00	40.00
251716WF001	16	37.50	42.50
251717WF001	17	40.00	45.00
251718WF001	18	42.50	47.50
251719WF001	19	45.00	50.00
251720WF001	20	47.50	52.50

NOTE:

1. Wafer Material: Nylon 66 UL94V-0
Pin/Pos Material: brass bronze.
2. Plated: Tin-plated 50u"min.
3. Insulation resistance: 1000M Ω/min.
4. Withstand voltage: 1000V AC/minute.
5. Current retang: 3A AC/DC.
6. Voltage rating: 250V AC/DC

				UNLESS OTHERWISE SPECIFIED TOLERANCES	
				3 PLACE ±0.5 ±0.10	
				2 PLACE ±1.5 ±0.25	
				1 PLACE ±2.0 ±0.50	
				ANGLE DIM	
REV.	REVISIONI		DIS	DATE	
SCALE	REV.	PAGE:	UNIT	mm	
5/1	A	1	THIRD ANGLE PROJECTION	C2517WF	

EXCON

EXCON TECHNOLOGY COMPANY

PART.NO

2517xxWF101