



C2517WS

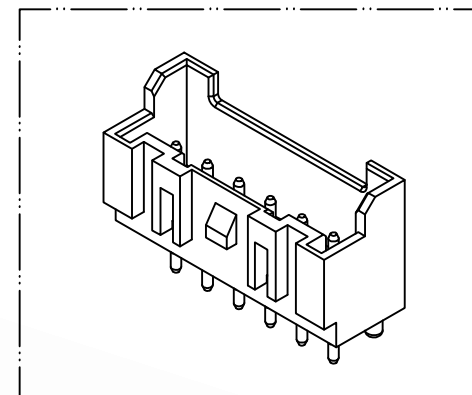

RECOMMENDED PCB LAYOUT
(PCB THK=0.8~1.6)

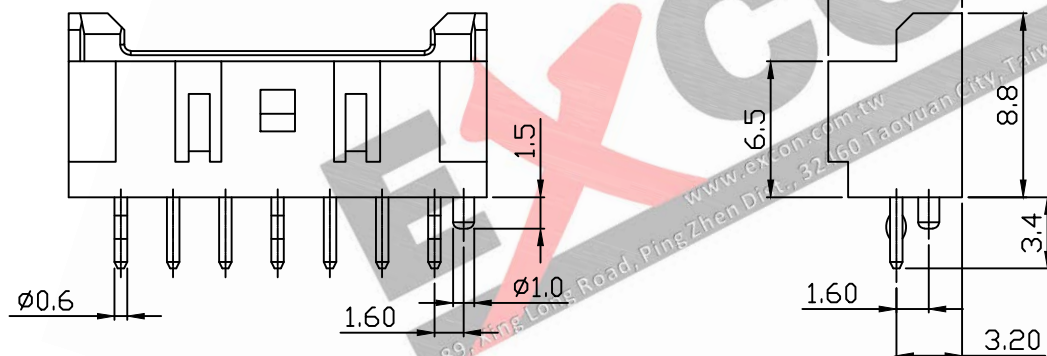

Dimensional &
Ordering Information:

Part No.	Circuits	Dim A	Dim B
251702WS001	2	2.50	7.50
251703WS001	3	5.00	10.00
251704WS001	4	7.50	12.50
251705WS001	5	10.00	15.00
251706WS001	6	12.50	17.50
251707WS001	7	15.00	20.00
251708WS001	8	17.50	22.50
251709WS001	9	20.00	25.00
251710WS001	10	22.50	27.50
251711WS001	11	25.00	30.00
251712WS001	12	27.50	32.50
251713WS001	13	30.00	35.00
251714WS001	14	32.50	37.50
251715WS001	15	35.00	40.00
251716WS001	16	37.50	42.50
251717WS001	17	40.00	45.00
251718WS001	18	42.50	47.50
251719WS001	19	45.00	50.00
251720WS001	20	47.50	52.50

NOTE:

1. Wafer Material: Nylon 46 or 6T UL94V-0
Pin/Pos Material: brass bronze.
2. Plated: Tin-plated 50u"min.
3. Insulation resistance: 1000M ohm/min.
4. Withstand voltage: 1000V AC/minute.
5. Current rating: 3A AC/DC.
6. Voltage rating: 250V AC/DC

					UNLESS OTHERWISE SPECIFIED TOLERANCES 3 PLACE ±0.5 ±0.10 2 PLACE ±1.5 ±0.25 1 PLACE ±2.0 ±0.50 ANGLE DIM	 <u>EXCON TECHNOLOGY COMPANY</u>
REV.	REVISION			DIS	DATE	
SCALE	REV.	PAGE:	UNIT mm		DWG NO:	PART.NO
NONE	B	1	THIRD ANGLE PROJECTION 		C2517WS	2517xxWS001