

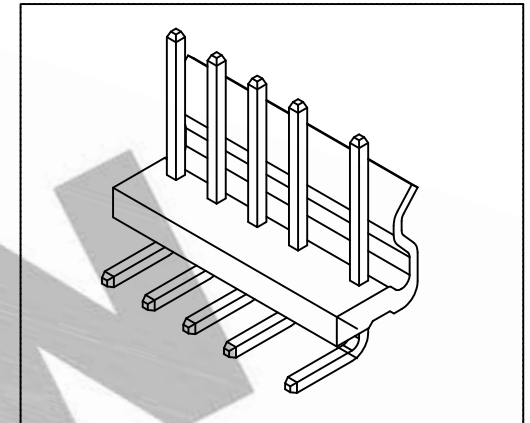
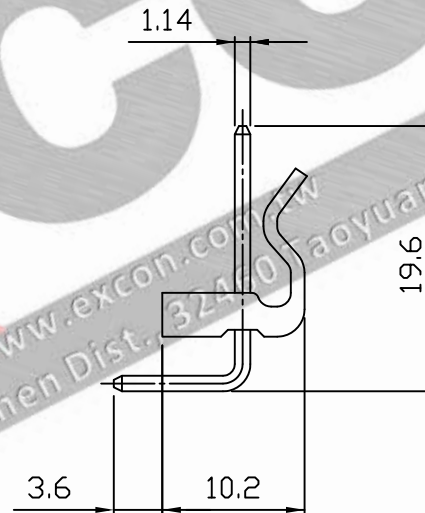
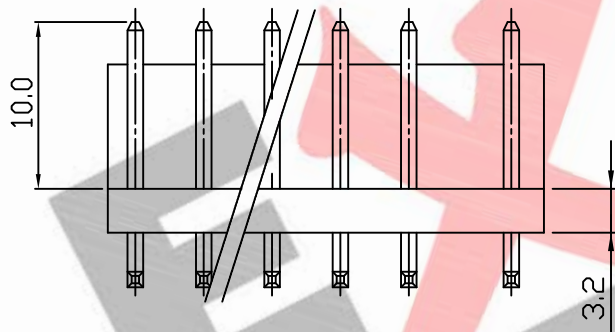


PART NO.
5088xxWR051
DWG NO.
C5088WR

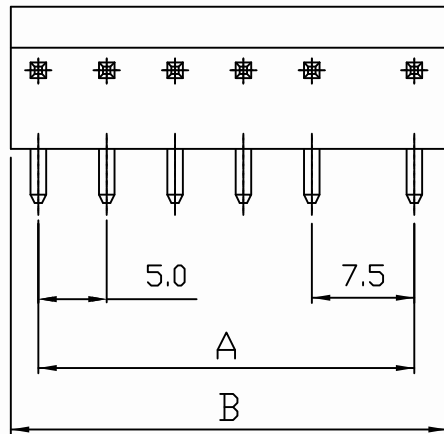

TOLERANCES ARE NON-CUMULATIVE: ± 0.05

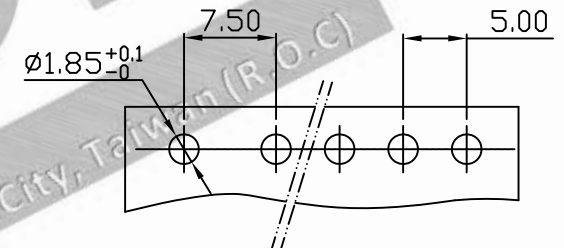

RECOMMENDED PCB LAYOUT
(PCB THK=1.0~1.6)

Dimensional & Ordering Information:

Part No.	Circuits	Dim A	Dim B
508802WR051	2	7.50	12.50
508803WR051	3	12.50	17.50
508804WR051	4	17.50	22.50
508805WR051	5	22.50	27.50
508806WR051	6	27.50	32.50

NOTE:

- Wafer Material: Nylon 66 UL94V-2
Pin/Pos Material: brass bronze.
- Plated: Tin-plated 50u"min.
- Insulation resistance: 1000M ohm/min.
- Withstand voltage: 1500V AC/minute.
- Current rating: 5A AC/DC.
- Voltage rating: 250V AC/DC

						UNLESS OTHERWISE SPECIFIED TOLERANCES 3 PLACE ±0.5 ±0.10 2 PLACE ±1.5 ±0.35 1 PLACE ±2.0 ±0.50 ANGLE DIM	EXCON EXCON TECHNOLOGY COMPANY
REV.	REVISIONI			DIS	DATE		
SCALE	REV.	PAGE:	UNIT	mm		DWG NO:	
1/1	A	1/1	THIRD ANGLE PROJECTION			C5088WR	
							5088xxWR051