


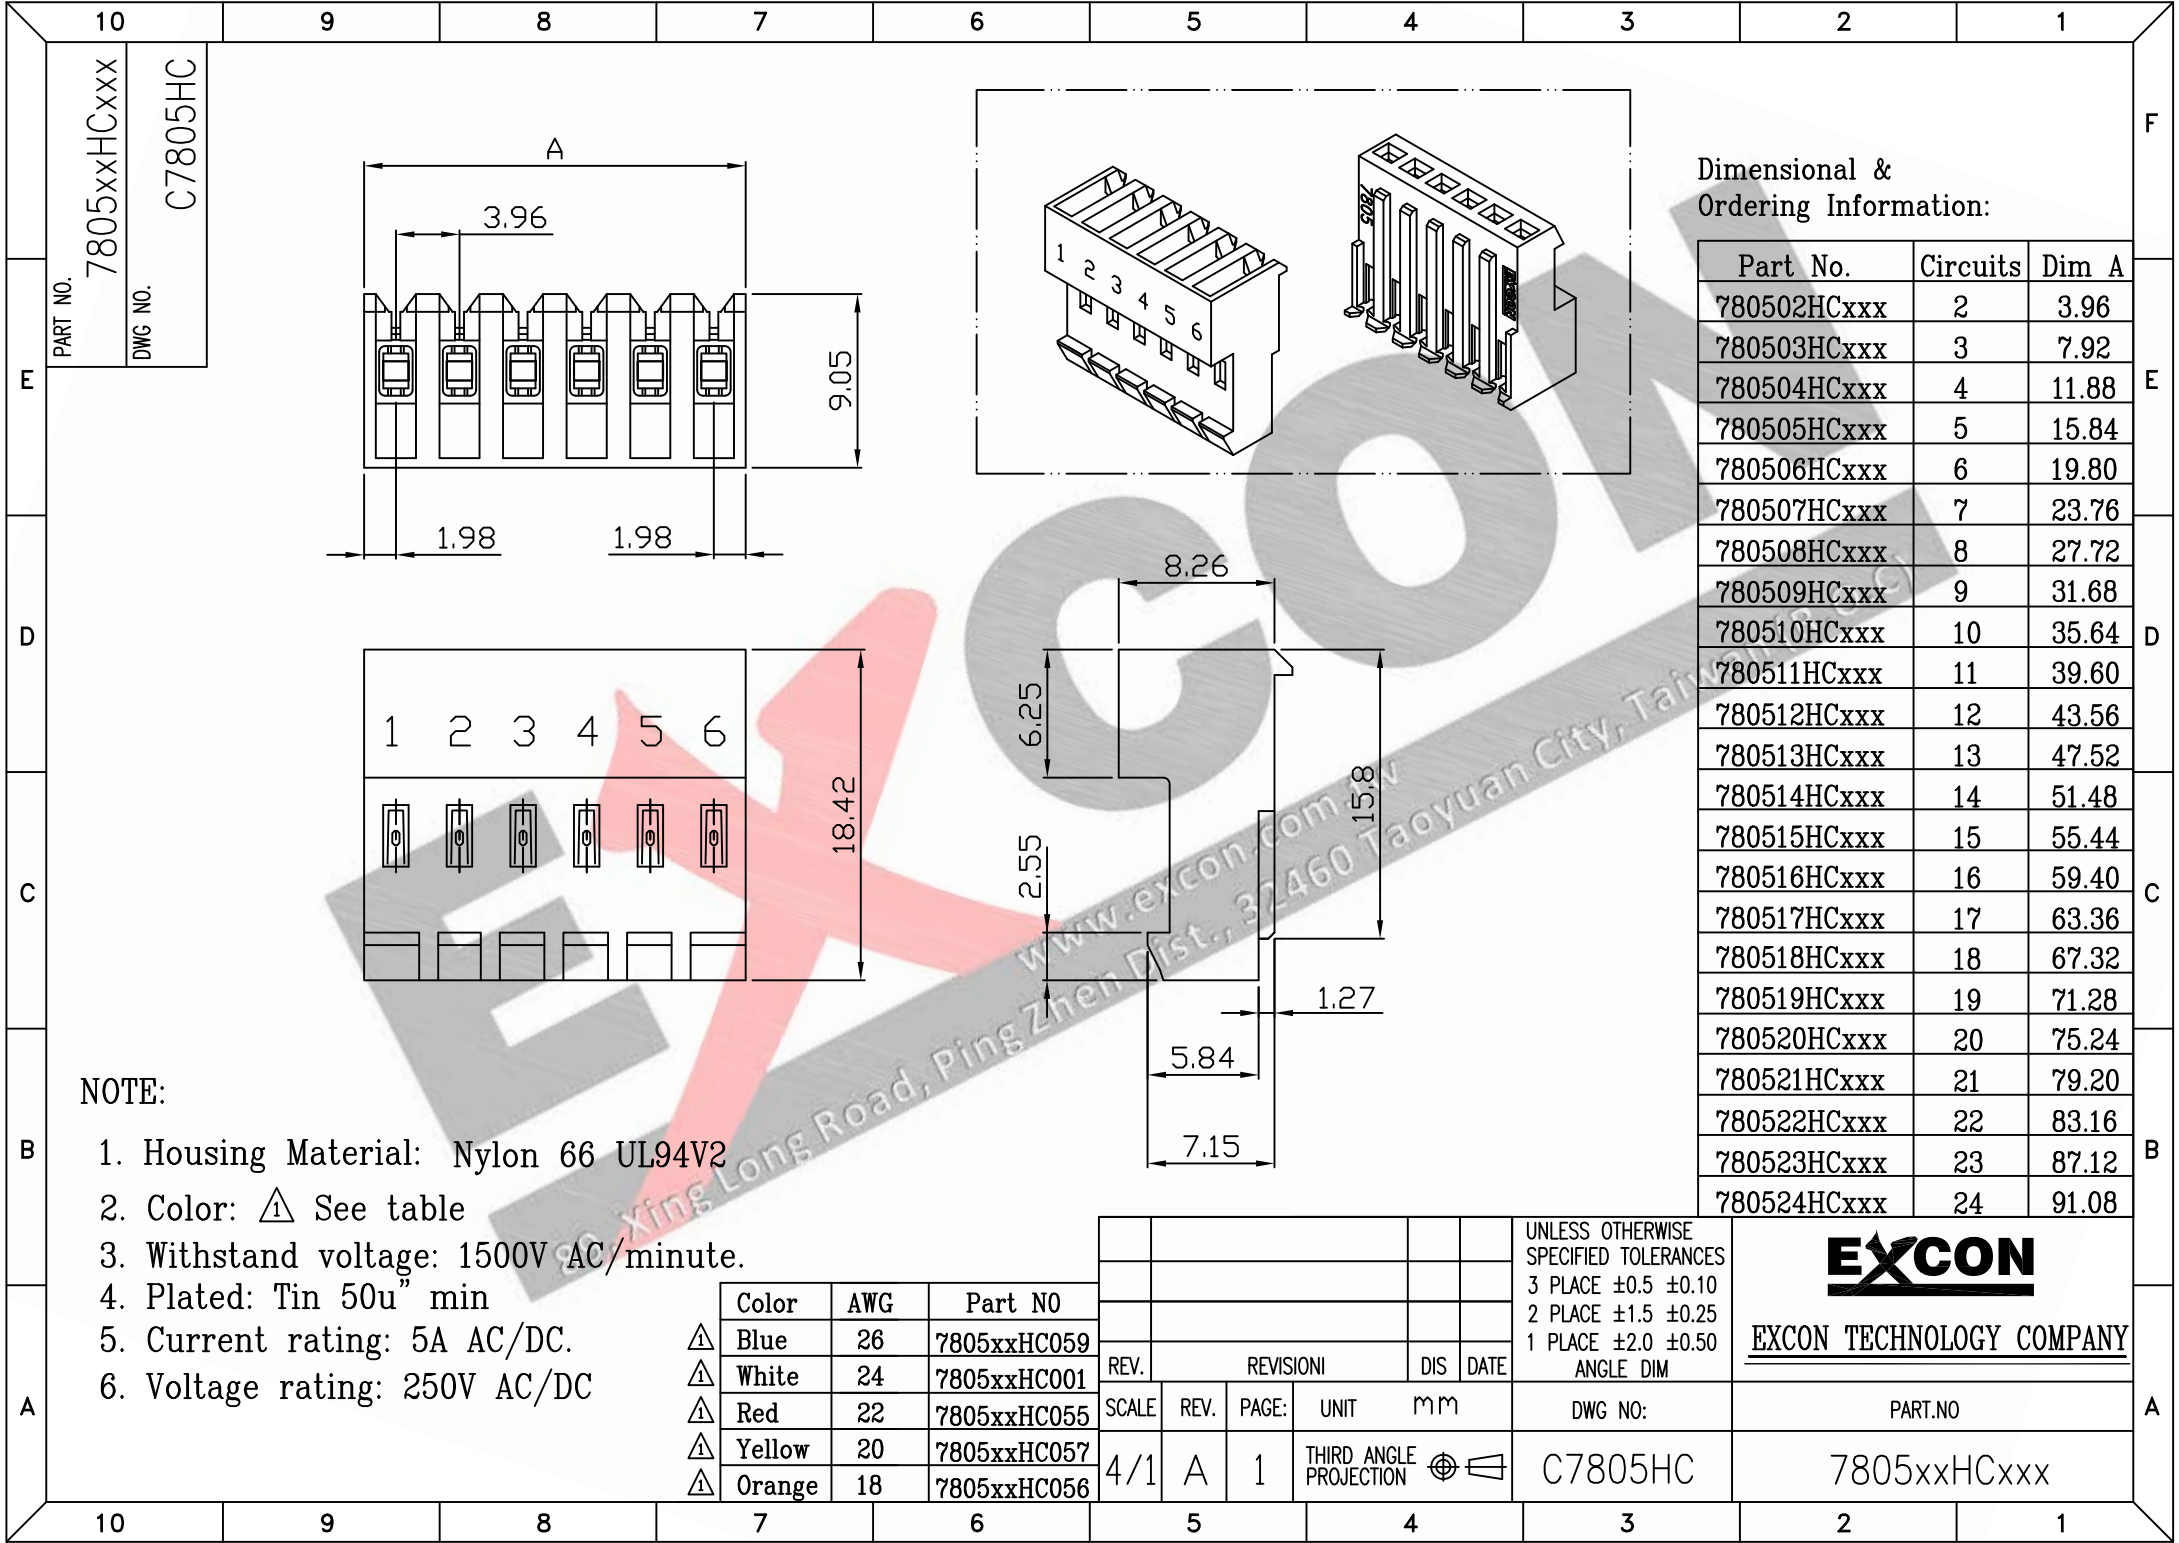

Dimensional & Ordering Information:

Part No.	Circuits	Dim A
780502HCxxx	2	3.96
780503HCxxx	3	7.92
780504HCxxx	4	11.88
780505HCxxx	5	15.84
780506HCxxx	6	19.80
780507HCxxx	7	23.76
780508HCxxx	8	27.72
780509HCxxx	9	31.68
780510HCxxx	10	35.64
780511HCxxx	11	39.60
780512HCxxx	12	43.56
780513HCxxx	13	47.52
780514HCxxx	14	51.48
780515HCxxx	15	55.44
780516HCxxx	16	59.40
780517HCxxx	17	63.36
780518HCxxx	18	67.32
780519HCxxx	19	71.28
780520HCxxx	20	75.24
780521HCxxx	21	79.20
780522HCxxx	22	83.16
780523HCxxx	23	87.12
780524HCxxx	24	91.08

- NOTE:
1. Housing Material: Nylon 66 UL94V2
 2. Color: Δ See table
 3. Withstand voltage: 1500V AC/minute.
 4. Plated: Tin 50u" min
 5. Current rating: 5A AC/DC.
 6. Voltage rating: 250V AC/DC

	Color	AWG	Part N0
Δ	Blue	26	7805xxHC059
Δ	White	24	7805xxHC001
Δ	Red	22	7805xxHC055
Δ	Yellow	20	7805xxHC057
Δ	Orange	18	7805xxHC056

REV.	REVISIONI	DIS	DATE
SCALE	REV.	PAGE:	UNIT
4/1	A	1	THIRD ANGLE PROJECTION

UNLESS OTHERWISE SPECIFIED TOLERANCES
3 PLACE ± 0.5 ± 0.10
2 PLACE ± 1.5 ± 0.25
1 PLACE ± 2.0 ± 0.50
ANGLE DIM

EXCON

EXCON TECHNOLOGY COMPANY

DWG NO:

PART.NO

C7805HC

7805xxHCxxx