


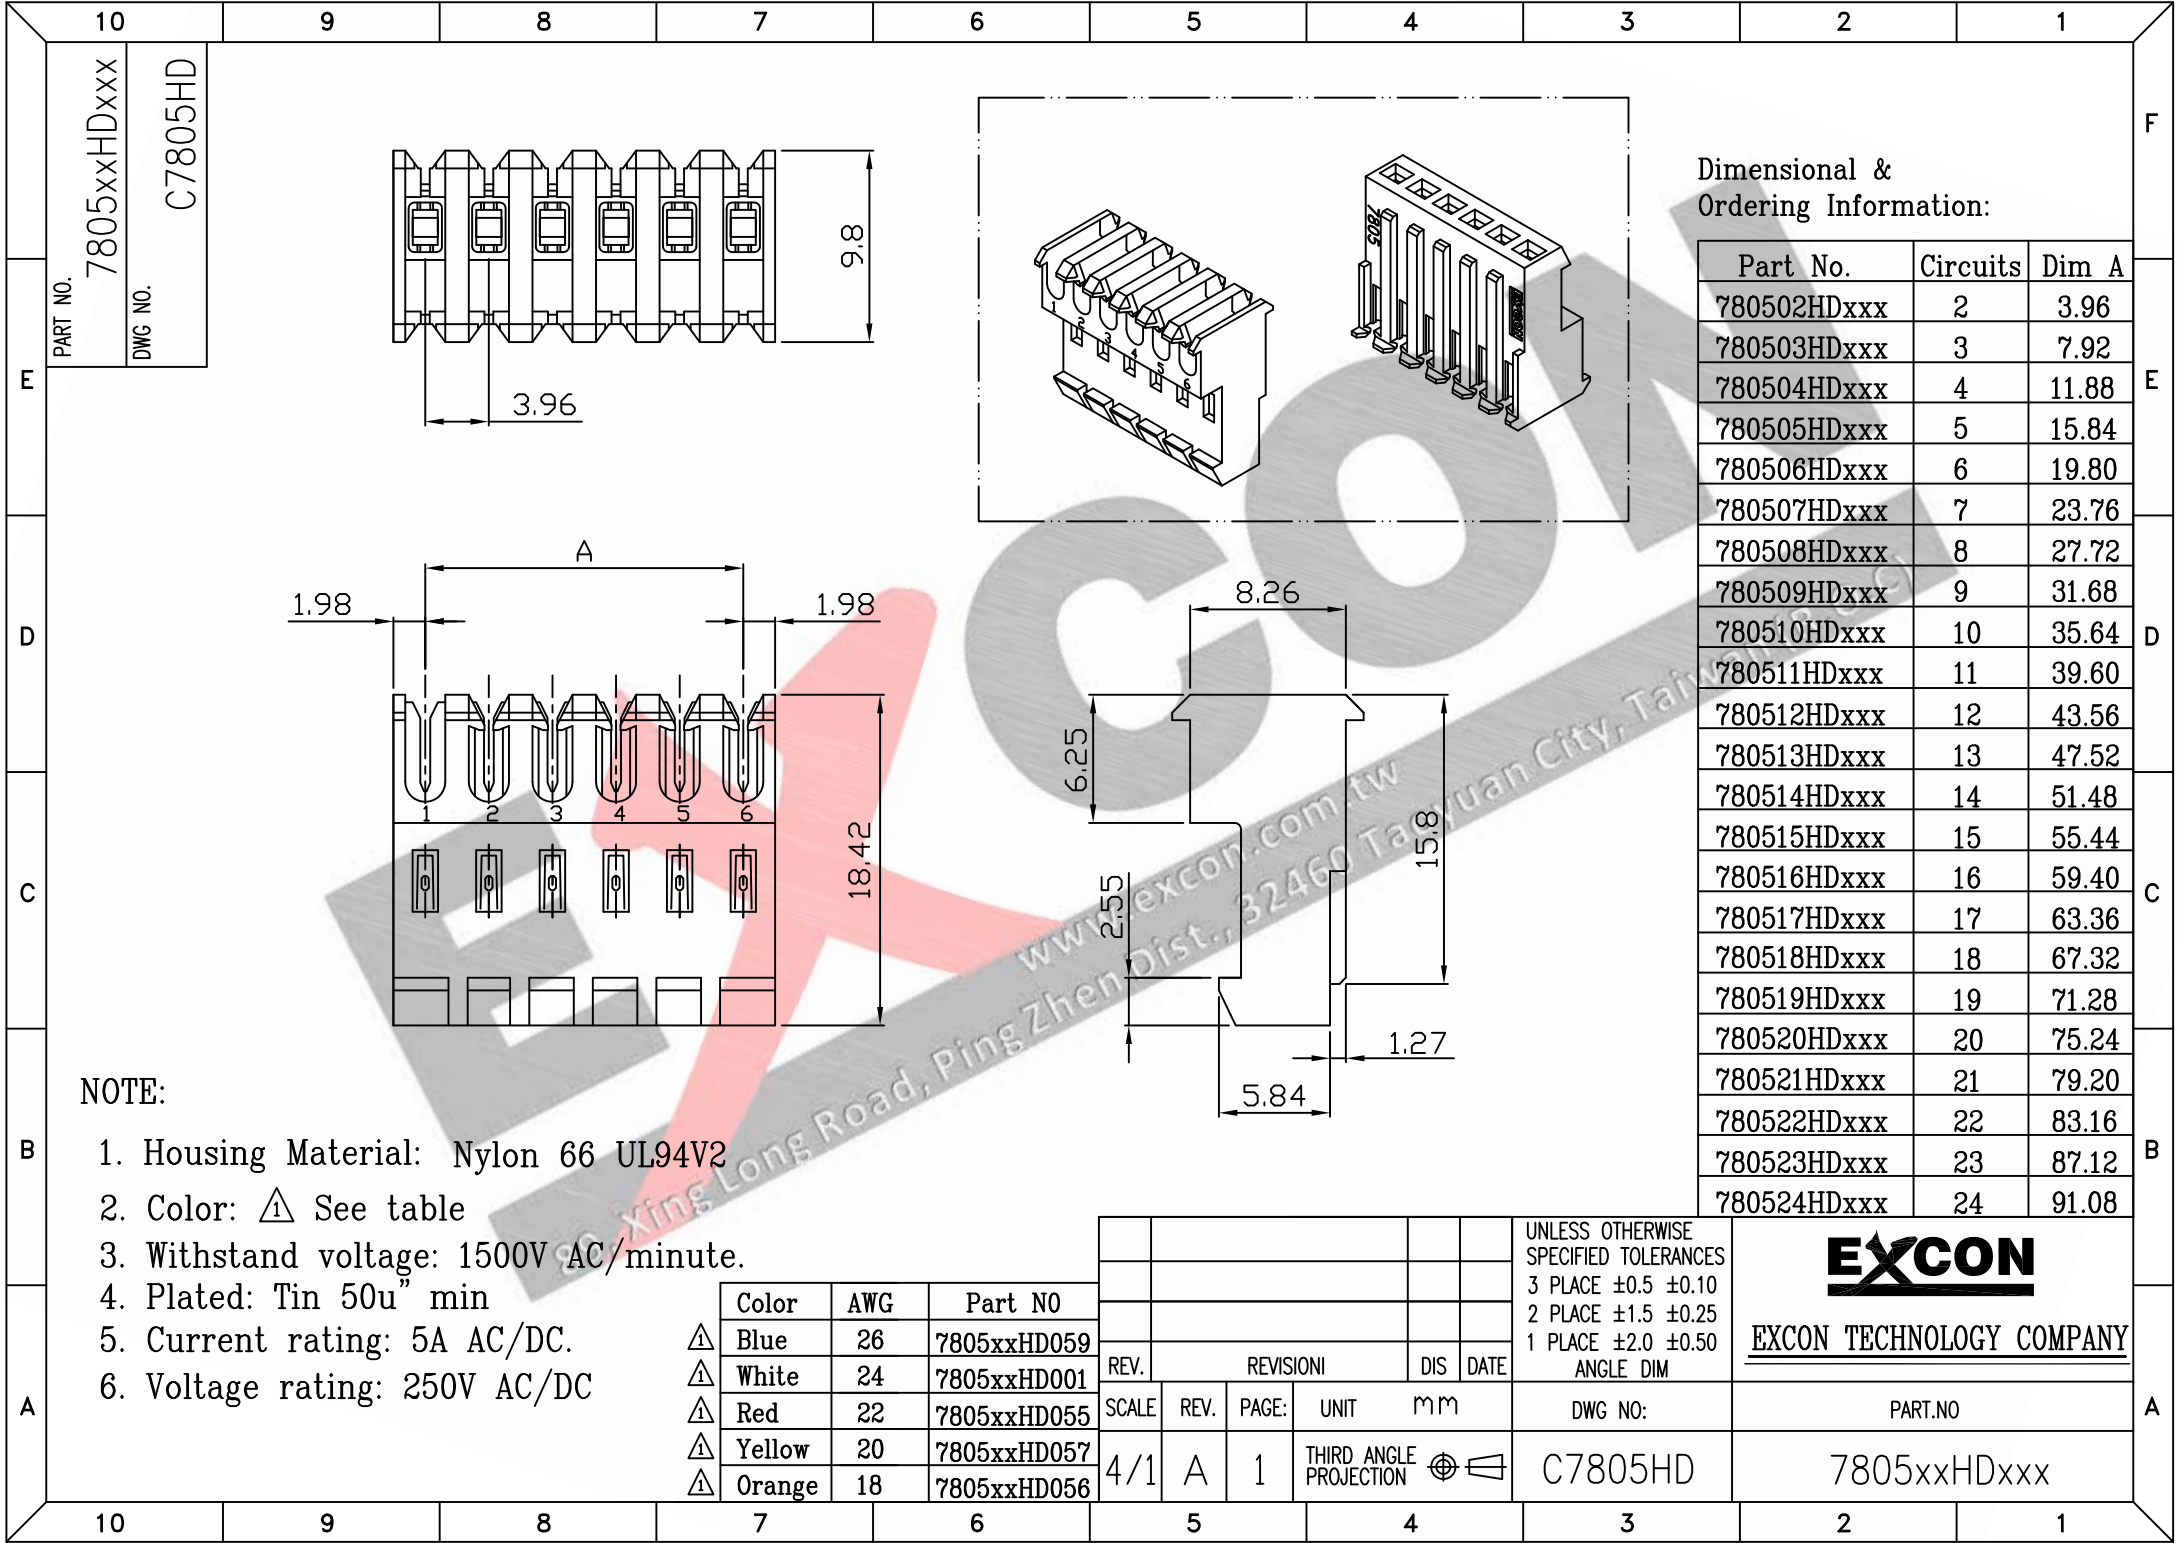

Dimensional & Ordering Information:

Part No.	Circuits	Dim A
780502HDxxx	2	3.96
780503HDxxx	3	7.92
780504HDxxx	4	11.88
780505HDxxx	5	15.84
780506HDxxx	6	19.80
780507HDxxx	7	23.76
780508HDxxx	8	27.72
780509HDxxx	9	31.68
780510HDxxx	10	35.64
780511HDxxx	11	39.60
780512HDxxx	12	43.56
780513HDxxx	13	47.52
780514HDxxx	14	51.48
780515HDxxx	15	55.44
780516HDxxx	16	59.40
780517HDxxx	17	63.36
780518HDxxx	18	67.32
780519HDxxx	19	71.28
780520HDxxx	20	75.24
780521HDxxx	21	79.20
780522HDxxx	22	83.16
780523HDxxx	23	87.12
780524HDxxx	24	91.08

NOTE:

1. Housing Material: Nylon 66 UL94V2
2. Color: Δ See table
3. Withstand voltage: 1500V AC/minute.
4. Plated: Tin 50u" min
5. Current rating: 5A AC/DC.
6. Voltage rating: 250V AC/DC

	Color	AWG	Part N0
Δ	Blue	26	7805xxHD059
Δ	White	24	7805xxHD001
Δ	Red	22	7805xxHD055
Δ	Yellow	20	7805xxHD057
Δ	Orange	18	7805xxHD056

					UNLESS OTHERWISE SPECIFIED TOLERANCES 3 PLACE ±0.5 ±0.10 2 PLACE ±1.5 ±0.25 1 PLACE ±2.0 ±0.50 ANGLE DIM	EXCON EXCON TECHNOLOGY COMPANY
REV.	REVISIONI			DIS		
SCALE	REV.	PAGE:	UNIT mm		DWG NO:	PART.NO
4/1	A	1	THIRD ANGLE PROJECTION		C7805HD	7805xxHDxxx