


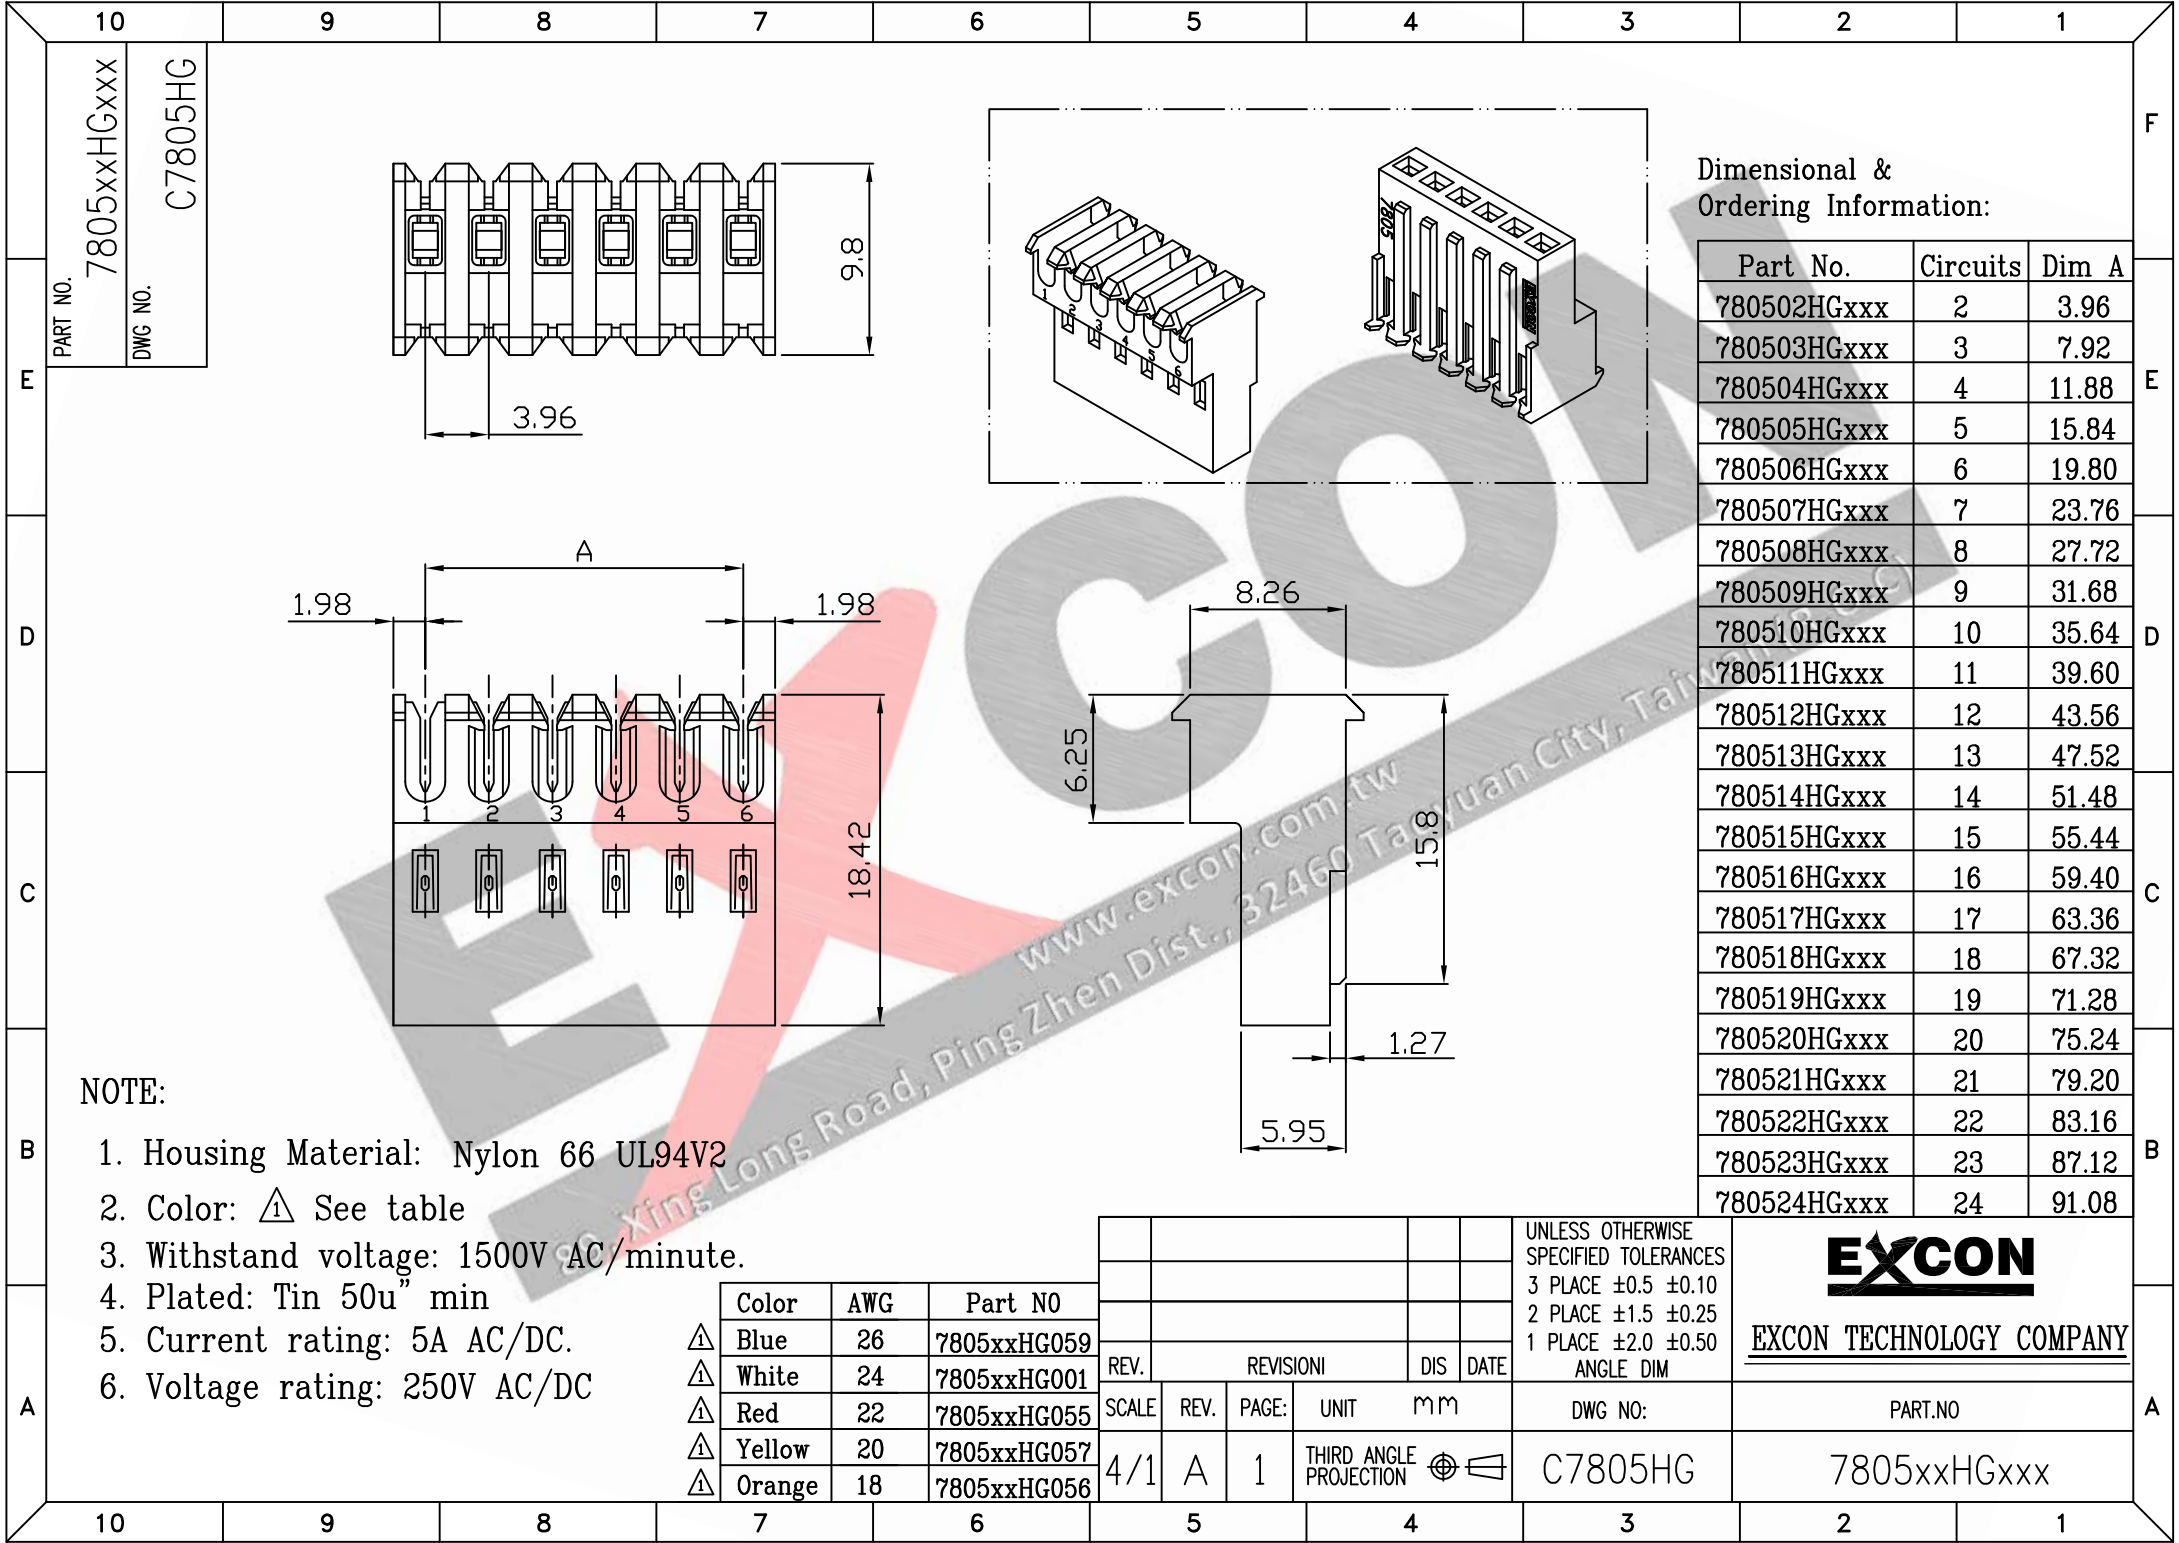

Dimensional & Ordering Information:

Part No.	Circuits	Dim A
780502HGxxx	2	3.96
780503HGxxx	3	7.92
780504HGxxx	4	11.88
780505HGxxx	5	15.84
780506HGxxx	6	19.80
780507HGxxx	7	23.76
780508HGxxx	8	27.72
780509HGxxx	9	31.68
780510HGxxx	10	35.64
780511HGxxx	11	39.60
780512HGxxx	12	43.56
780513HGxxx	13	47.52
780514HGxxx	14	51.48
780515HGxxx	15	55.44
780516HGxxx	16	59.40
780517HGxxx	17	63.36
780518HGxxx	18	67.32
780519HGxxx	19	71.28
780520HGxxx	20	75.24
780521HGxxx	21	79.20
780522HGxxx	22	83.16
780523HGxxx	23	87.12
780524HGxxx	24	91.08

- NOTE:
1. Housing Material: Nylon 66 UL94V2
 2. Color: Δ See table
 3. Withstand voltage: 1500V AC/minute.
 4. Plated: Tin 50u" min
 5. Current rating: 5A AC/DC.
 6. Voltage rating: 250V AC/DC

	Color	AWG	Part N0
Δ	Blue	26	7805xxHG059
Δ	White	24	7805xxHG001
Δ	Red	22	7805xxHG055
Δ	Yellow	20	7805xxHG057
Δ	Orange	18	7805xxHG056

				UNLESS OTHERWISE SPECIFIED TOLERANCES	
				3 PLACE ± 0.5 ± 0.10	
				2 PLACE ± 1.5 ± 0.25	
				1 PLACE ± 2.0 ± 0.50	
				ANGLE DIM	
REV.	REVISIONI			DIS	DATE
SCALE	REV.	PAGE:	UNIT	mm	
4/1	A	1	THIRD ANGLE PROJECTION		

EXCON	
EXCON TECHNOLOGY COMPANY	
PART.NO	
7805xxHGxxx	