
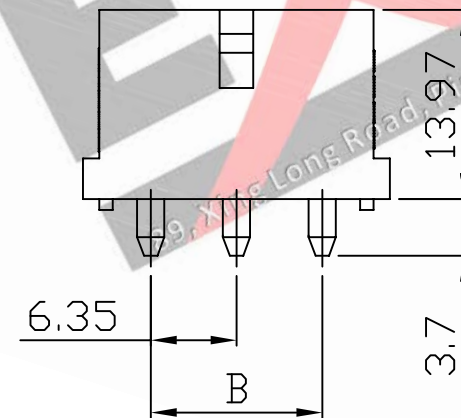
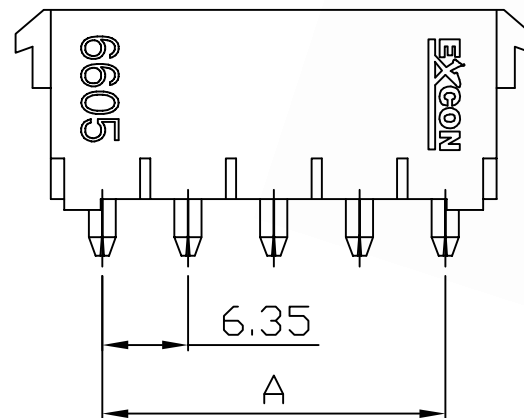
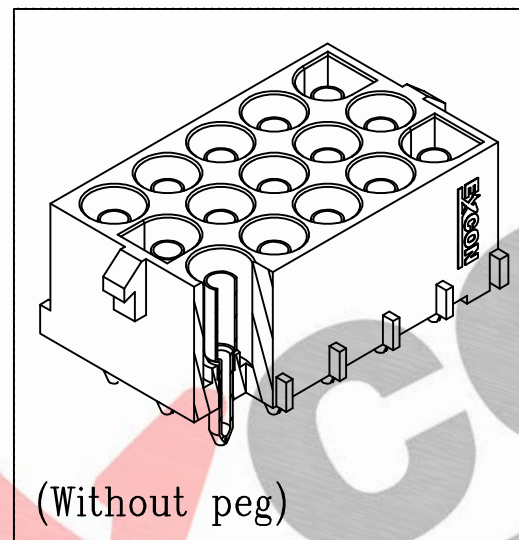
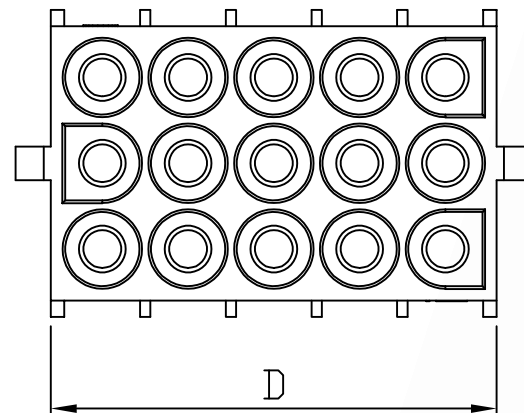
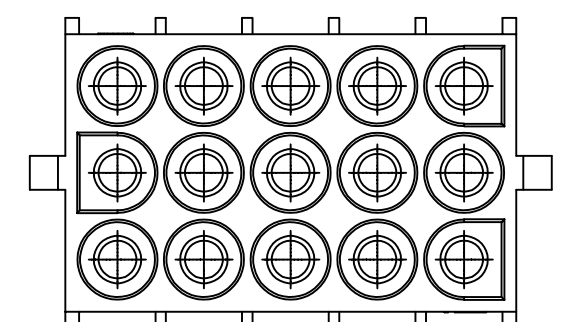

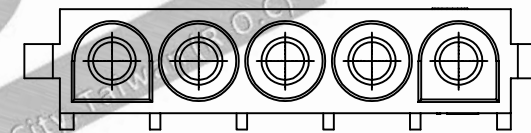
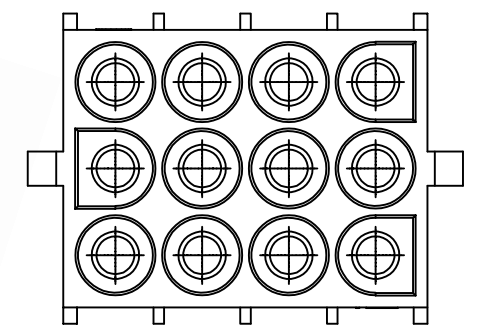
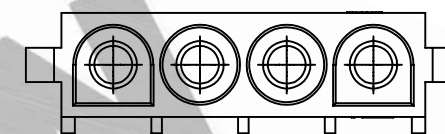
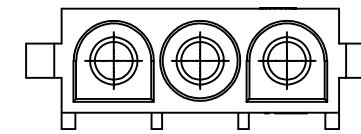
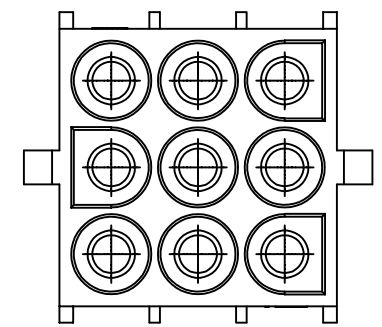

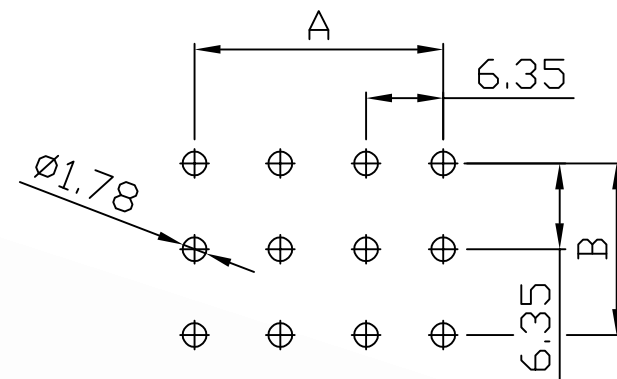


Dimensional & Ordering Information:



NOTE:

1. Housing Material: Nylon 66 UL94V2
2. Color: Natural
3. Withstand voltage: 5000V AC/minute.
4. Current rating: 5A AC/DC.
5. Voltage rating: 600V AC/DC

				UNLESS OTYERWISE SPECIFIED TOLERANCES 3 PLACE ±0.5 ±0.10 2 PLACE ±1.5 ±0.25 1 PLACE ±2.0 ±0.50 ANGLE DIM	EXCON EXCON TECHNOLOGY COMPANY	
REV.	REVISIONI		DIS			DATE
SCALE	REV.	PAGE:	UNIT	mm	DWG NO:	PART.NO
NONE	B	1/1	TYIRD ANGLE PROJECTION		C6605WF	6605xxWF051