







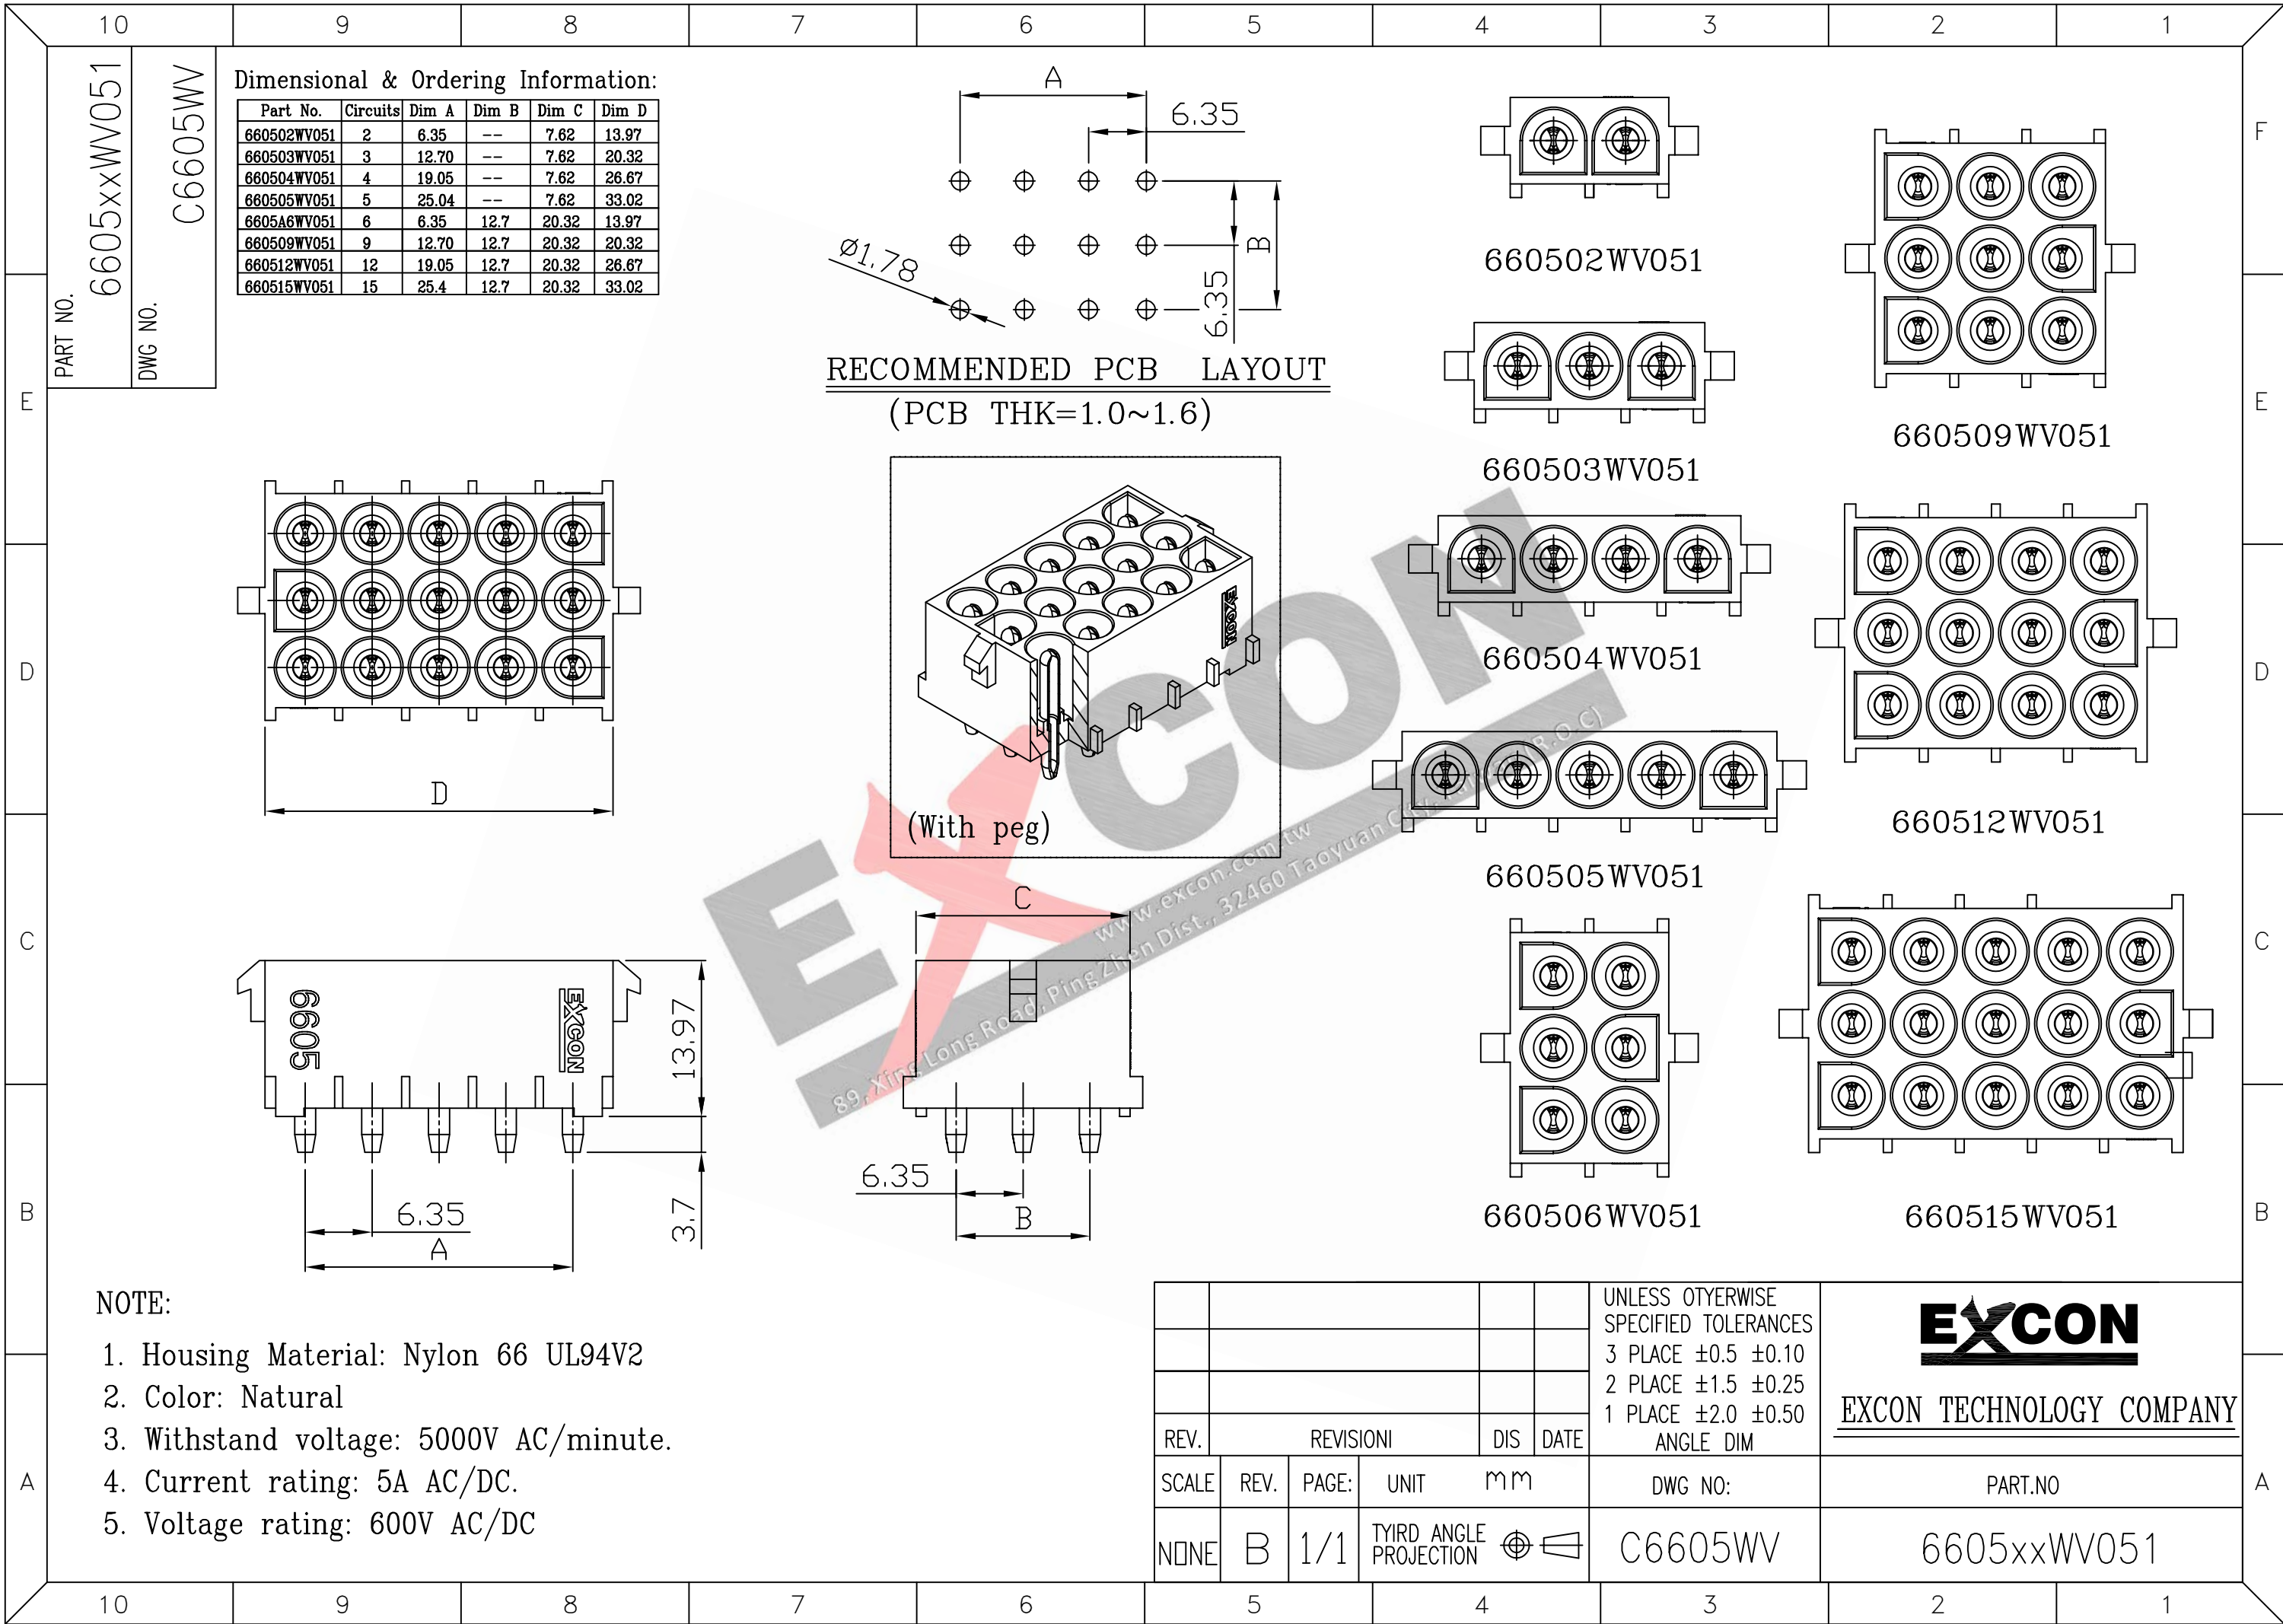


Dimensional & Ordering Information:


Part No.	Circuits	Dim A	Dim B	Dim C	Dim D
660502WV051	2	6.35	--	7.62	13.97
660503WV051	3	12.70	--	7.62	20.32
660504WV051	4	19.05	--	7.62	26.67
660505WV051	5	25.04	--	7.62	33.02
6605A6WV051	6	6.35	12.7	20.32	13.97
660509WV051	9	12.70	12.7	20.32	20.32
660512WV051	12	19.05	12.7	20.32	26.67
660515WV051	15	25.4	12.7	20.32	33.02

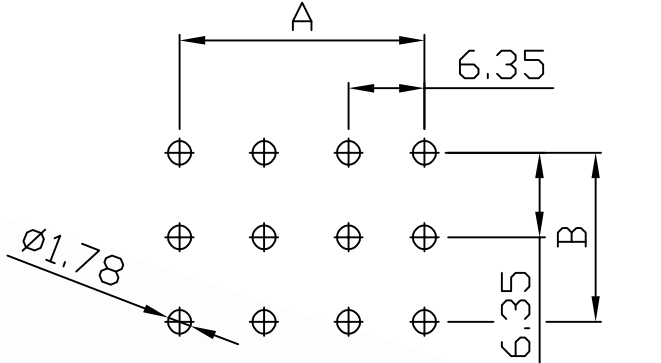


RECOMMENDED PCB LAYOUT
(PCB THK=1.0~1.6)

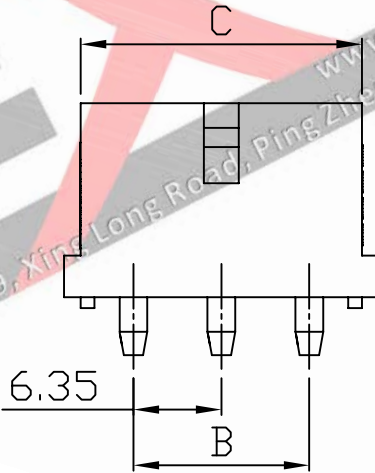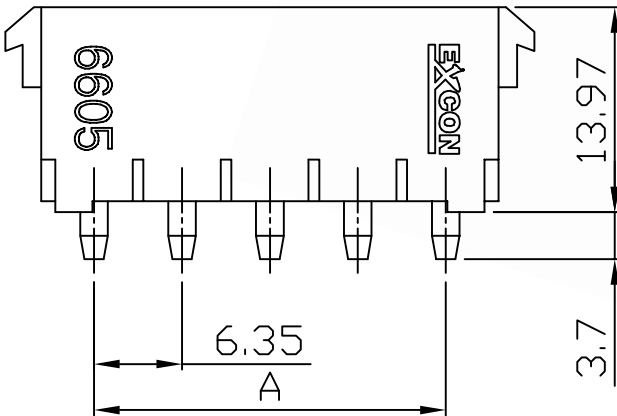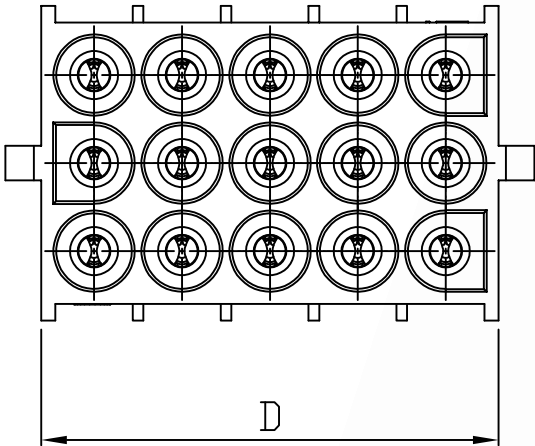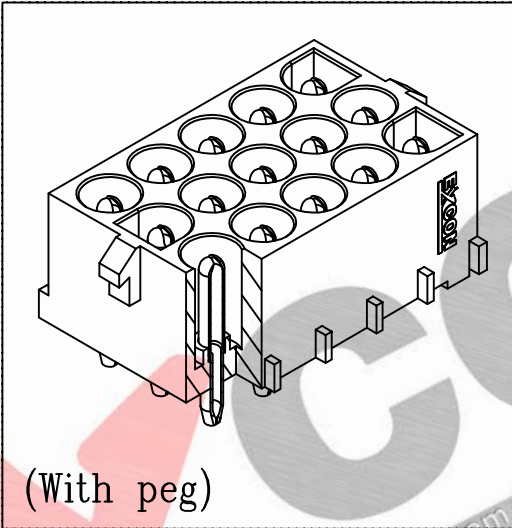


660502WV051

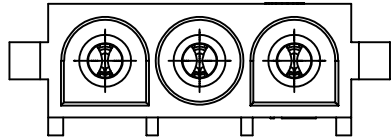


660503WV051

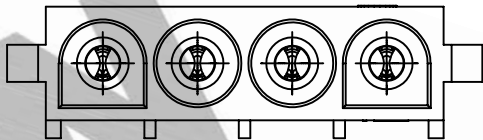


660504WV051

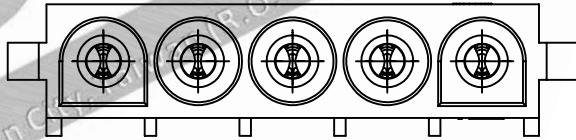


660505WV051




660506WV051

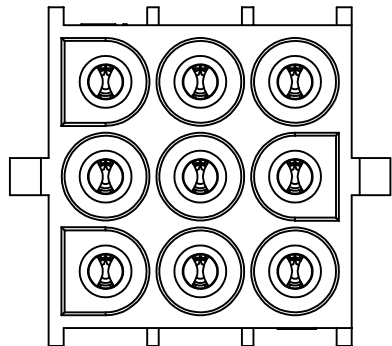

660509WV051

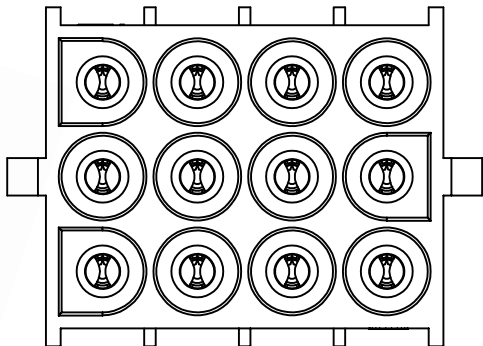


660512WV051

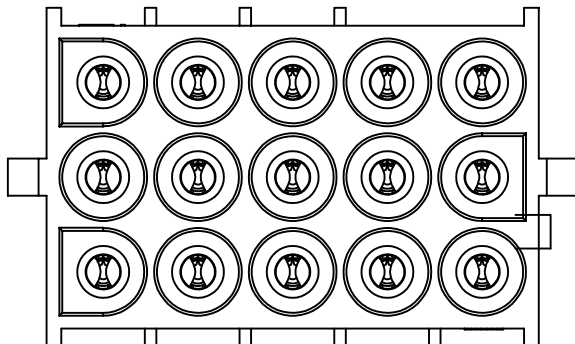

660515WV051

NOTE:

1. Housing Material: Nylon 66 UL94V2
2. Color: Natural
3. Withstand voltage: 5000V AC/minute.
4. Current rating: 5A AC/DC.
5. Voltage rating: 600V AC/DC

						UNLESS OTYERWISE SPECIFIED TOLERANCES 3 PLACE ±0.5 ±0.10 2 PLACE ±1.5 ±0.25 1 PLACE ±2.0 ±0.50 ANGLE DIM	EXCON EXCON TECHNOLOGY COMPANY
REV.	REVISIONI			DIS	DATE		
SCALE	REV.	PAGE:	UNIT	mm		DWG NO:	PART.NO
NONE	B	1/1	TYIRD ANGLE PROJECTION			C6605WV	6605xxWV051