

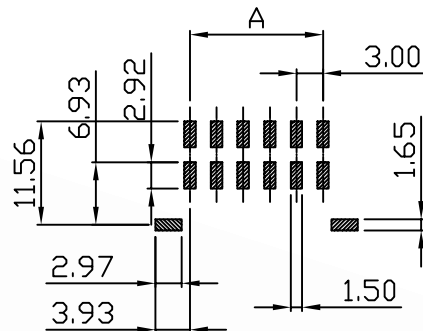
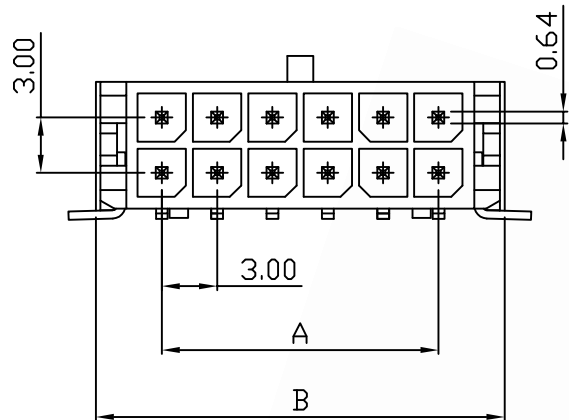
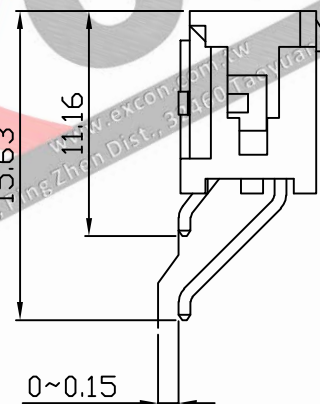


PART NO. 3001xxWE003
DWG NO. C3001WE

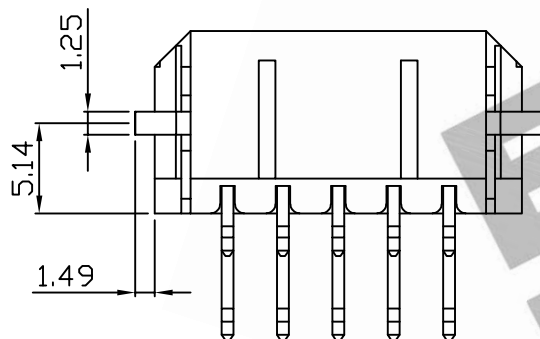

RECOMMENDED PCB LAYOUT
(PCB T=1.0~1.6mm)

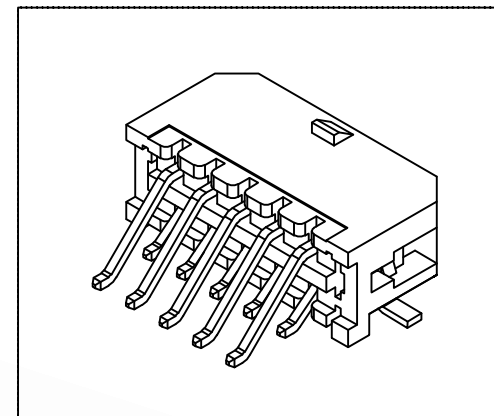

NOTE:

1. Wafer Material: Polyester LCP UL94-V0
Pin/Pos Material: brass bronze.
2. Plated: Tin-plated 50u"min.
3. Insulation resistance: 1000MΩ min.
4. Withstand voltage: 1500V AC/minute.
5. Current rating: 5A AC/DC.
6. Voltage rating: 250V AC/DC

Dimensional & Ordering Information:

Part No.	Circuits	Dim A	Dim B
300102WE103	2	--	6.65
300104WE103	4	3.0	9.65
300106WE103	6	6.0	12.65
300108WE103	8	9.0	15.65
300110WE103	10	12.0	18.65
300112WE103	12	15.0	21.65
300114WE103	14	18.0	24.65
300116WE103	16	21.0	27.65
300118WE103	18	24.0	30.65
300120WE103	20	27.0	33.65
300122WE103	22	30.0	36.65
300124WE103	24	33.0	39.65

REV.	REVISION	DIS	DATE
SCALE	REV.	PAGE:	UNIT
NONE	B	1	THIRD ANGLE PROJECTION

UNLESS OTHERWISE SPECIFIED TOLERANCES
3 PLACE ±0.5 ±0.10
2 PLACE ±1.5 ±0.25
1 PLACE ±2.0 ±0.50
ANGLE DIM

DWG NO: C3001WE

EXCON
EXCON TECHNOLOGY COMPANY

PART.NO
3001xxWE003