

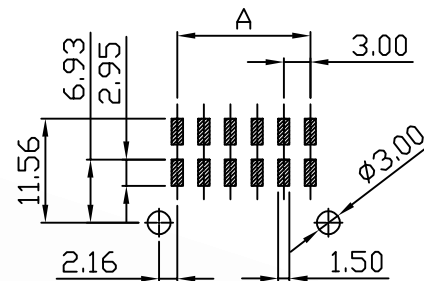
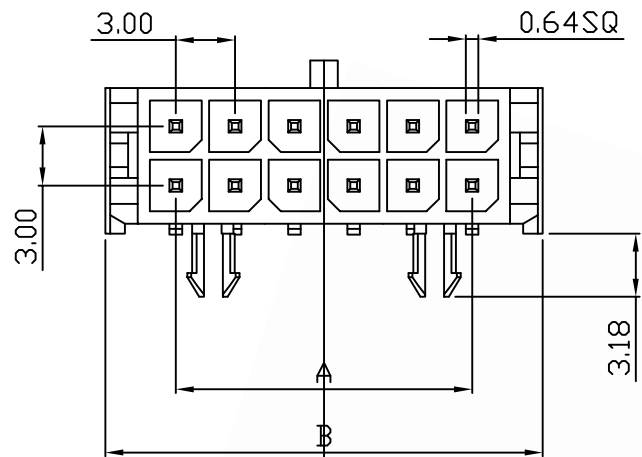
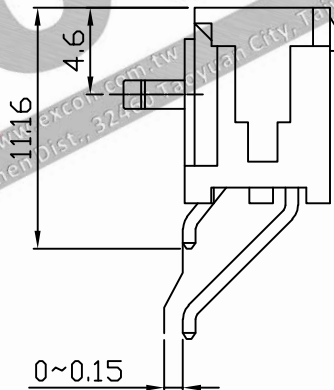


PART NO.
3001xxWH003
DWG NO.
C3001WH

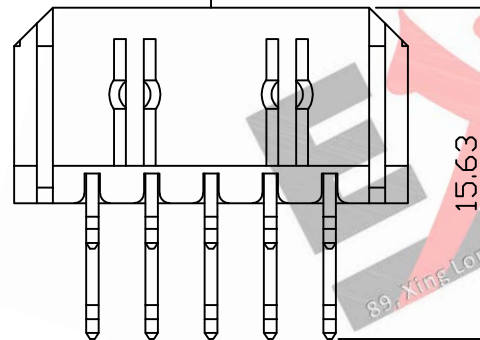

RECOMMENDED PCB LAYOUT
(PCB T=1.0~1.6mm)

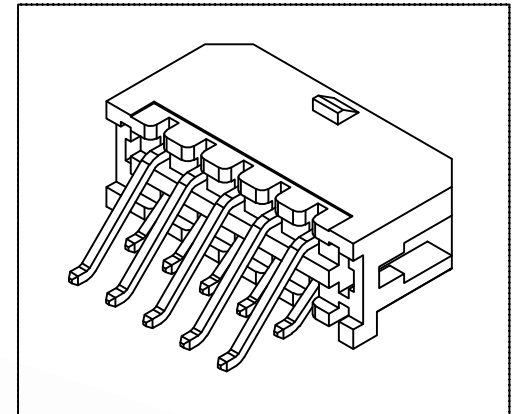

NOTE:

1. Wafer Material: Polyester LCP UL94-V0
Pin/Pos Material: brass bronze.
2. Plated: Tin-plated 50u"min.
3. Insulation resistance: 1000MΩ min.
4. Withstand voltage: 1500V AC/minute.
5. Current rating: 5A AC/DC.
6. Voltage rating: 250V AC/DC

Dimensional & Ordering Information:

Part No.	Circuits	Dim A	Dim B
300102WH103	2	--	6.65
300104WH103	4	3.0	9.65
300106WH103	6	6.0	12.65
300108WH103	8	9.0	15.65
300110WH103	10	12.0	18.65
300112WH103	12	15.0	21.65
300114WH103	14	18.0	24.65
300116WH103	16	21.0	27.65
300118WH103	18	24.0	30.65
300120WH103	20	27.0	33.65
300122WH103	22	30.0	36.65
300124WH103	24	33.0	39.65

REV.	REVISION			DIS	DATE
SCALE	REV.	PAGE:	UNIT	mm	
NONE	B	1	THIRD ANGLE PROJECTION		

UNLESS OTHERWISE SPECIFIED TOLERANCES 3 PLACE ±0.5 ±0.10 2 PLACE ±1.5 ±0.25 1 PLACE ±2.0 ±0.50 ANGLE DIM
DWG NO: C3001WH

EXCON EXCON TECHNOLOGY COMPANY
PART.NO 3001xxWH003