


Double-Pole and Single-Pole Rocker Power Switches



Approval & Rating:

Rating	Approval
16(4)A 250VAC~T125/55	
6A 125/250VAC~T125/85	
10A 125/250VAC~T125/85	
12A 125/250VAC~T125/85	
16(4)A 250VAC~T125/85	

PANEL CUTOUT DIMENSION:
(面板安裝孔開口尺寸)



PANEL THICKNESS	X	Y
0.75~1.25mm	19.2 $\begin{smallmatrix} +0.0 \\ -0.1 \end{smallmatrix}$ mm	12.9 $\begin{smallmatrix} +0.1 \\ -0.0 \end{smallmatrix}$ mm
1.25~2.0mm	19.4 $\begin{smallmatrix} +0.0 \\ -0.1 \end{smallmatrix}$ mm	12.9 $\begin{smallmatrix} +0.1 \\ -0.0 \end{smallmatrix}$ mm
2.0~3.0mm	19.8 $\begin{smallmatrix} +0.0 \\ -0.1 \end{smallmatrix}$ mm	12.9 $\begin{smallmatrix} +0.1 \\ -0.0 \end{smallmatrix}$ mm

Electrical(電氣性能):

(接觸電阻) INITIAL CONTACT RESISTANCE: 20Ω Max

(操作力量) OPERATION FORCE: 500±200gf





(絕緣電阻) INSULATION RESISTANCE: 100mΩ Min 500VDC

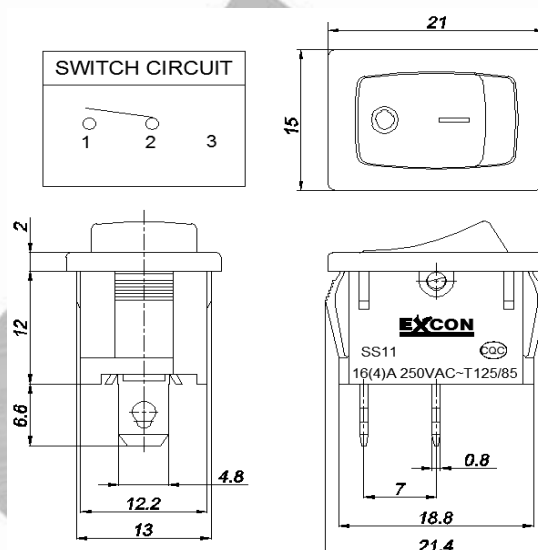
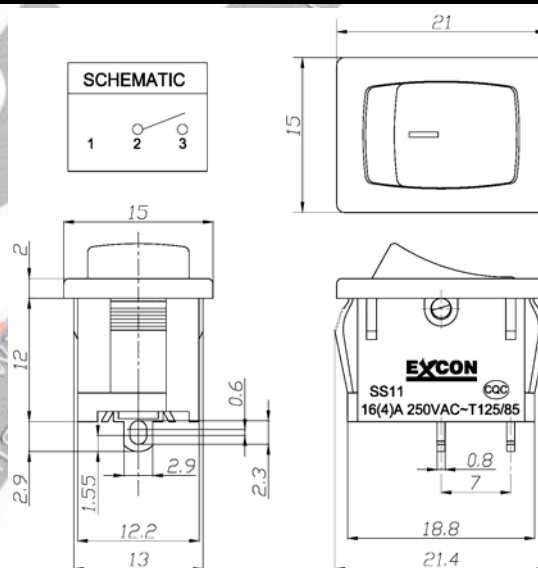
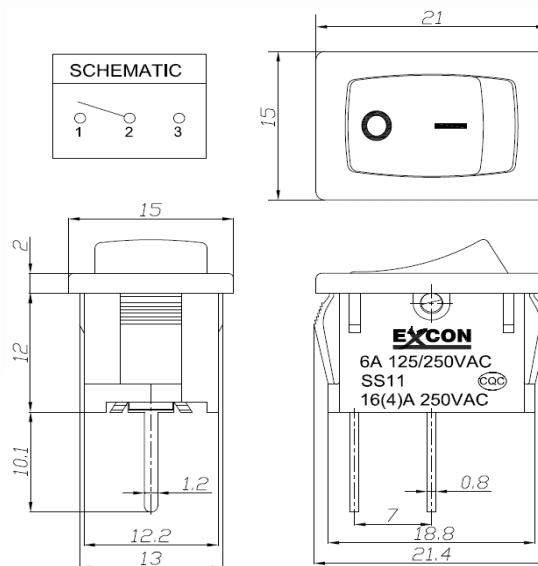
(電氣壽命) ENDURANCE: 10,000 CYCLES

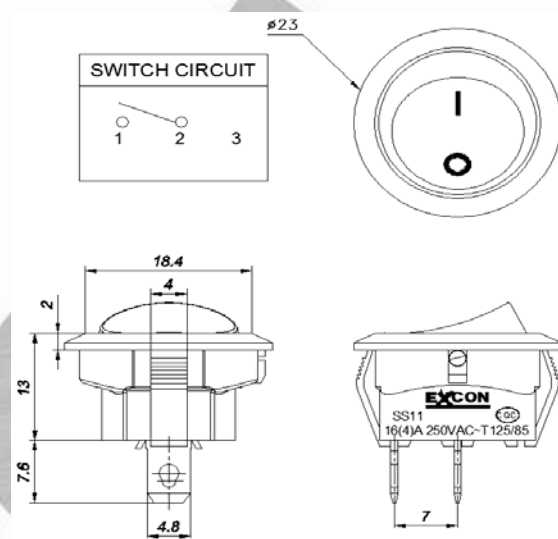
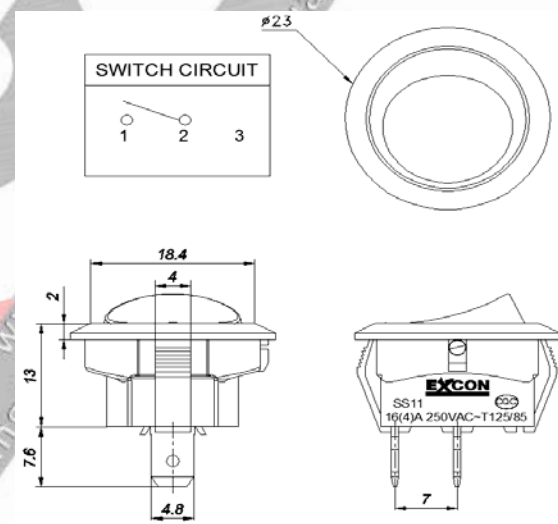
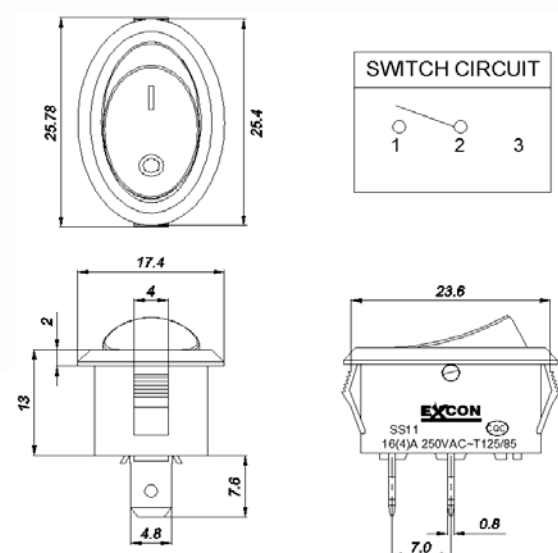
SPEC DRAWING(規格圖面)

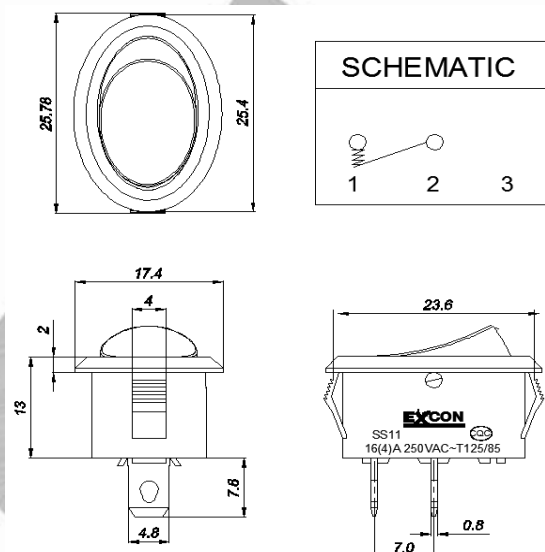
Unit: mm

SS11-BBNNQ-R20-R



SS11-WEIBC2-R20-R**SS11-BBAWA-R23-R****SS11-BBIWP-R20-R**

SS11-BBIWG-RR20-R**SS11-RBNNQ-RR20-R****SS11-BBIWQ-RE20-R**

SS11-EENNG-RE22-R

HOW TO ORDER(採購識別碼)

SS11 SERIES ORDERING SYSTEM

SS11		-	B	B	I	W	Q	-	R	R	A	2	0	-	L	0	3	-	R										
MODEL NO.																													
ACTUATOR COLOR		HOUSING COLOR		PRINTING COLOR		ACTUATOR TYPE		HOUSING TYPE		RATING		LAMP TYPE		RESISTOR		PRINTING OPTION		TERMINAL TYPE		CURRENT CIRCUIT		LIGHT COLOR		RoHS DIRECTIVE					
B	BLACK	W	WHITE	W	WHITE	R	ROCKER	Q	SQUARE	B	12A 125/250VAC 16A 125/250VAC	L	WITH LAMP		NONE	I		Q	QUICK-CONN		20	ON	-	OFF	SPST	0	AMBER(S)		
R	RED	E	GREY	B	BLACK			R	ROUND	A	12A 125/250VAC		NONE	1	100KΩ	O		S	SOLDERING		21	(ON)	-	OFF	SPST	2	RED	R	MEET RoHS DIRECTIVE
L	BLUE	G	GREEN	N	NONE			E	ELLIPSE					2	200KΩ	Q		G	QUICK-CONN		22	ON	-	(OFF)	SPST	3	GREEN		NONE
														3	300KΩ	A		P	PC TYPE		23	ON		OFF	SPST	4	BLUE		
																K		L	PC TYPE		30	ON		ON	SPDT		NONE		
																H		E	SOLDERING										

89, Xing Long Road, ping 2